

FOR ERRATA

AD 44135 1

THE FOLLOWING PAGES ARE CHANGES

TO BASIC DOCUMENT

AFCRL-64-163
MARCH 1964

Operational Prediction of Diffusion
Downwind From Line Sources

WILLIAM P. ELLIOTT
MORTON L. BARAD

Errata

Page 6

Equation (7) for

$$L - L_0 = x^{1-n_y}$$

read

$$L - L_0 = x^{(1-n_y)/2}$$

AIR FORCE CAMBRIDGE RESEARCH LABORATORIES
OFFICE OF AEROSPACE RESEARCH
UNITED STATES AIR FORCE
BEDFORD, MASSACHUSETTS

Requests for additional copies by Agencies of the Department of Defense, their contractors, and other government agencies should be directed to the:

Defense Documentation Center
Cameron Station
Alexandria, Virginia

Department of Defense contractors must be established for DDC services, or have their 'need-to-know' certified by the cognizant military agency of their project or contract.

All other persons and organizations should apply to the:

U.S. DEPARTMENT OF COMMERCE
OFFICE OF TECHNOLOGICAL SERVICES
WASHINGTON 25, D.C.

Best Available Copy

AFCRL-64-163
MARCH 1964

(5) *W. P. Elliott*
John B. Barad

**Air Force Surveys in Geophysics
No. 156**

(6)

AFRL - Cambridge
Operational Prediction of Diffusion Downwind From Line Sources

W. P. Elliott
WILLIAM P. ELLIOTT
MORTON L. BARAD

Abstract

Graphs of expected dosage from an infinite line source are presented for various wind speeds, heights of release, and stability conditions. The graphs are based on Sutton's diffusion equation with parameters derived from Project Prairie Grass data by Haugen, Barad, and Antanaitis. A method of estimating the range of validity of these equations for a line source of finite length is also presented.

Contents

1. INTRODUCTION	1
2. THE EQUATIONS	1
3. ESTIMATION OF PARAMETERS	3
4. ACCURACY OF EQUATIONS	4
5. THE LENGTH OF THE RELEASE LINE	5
ACKNOWLEDGMENTS	8
REFERENCES	8
APPENDIX A	9
APPENDIX B	55

Operational Prediction of Diffusion Downwind From Line Sources

1. INTRODUCTION

The Air Force has a requirement for knowledge of the ground-level distribution of various gases and aerosols, released in a quasi-instantaneous fashion, along lines that may either be ground-based or elevated. The purpose of this Survey is to provide a method whereby operations that require such information can be planned. Graphs of the expected ground-level dosage divided by source strength are given as a function of distance downwind from the release line for various heights of release, wind speeds, and the stability of the lower atmosphere.

The equations from which the graphs were constructed are based on those derived by Sutton.¹ While other equations have been presented, Sutton's are the best known and most widely studied and require fewer specialized measurements. In order to appreciate the limitations of the results, presented in Appendix A, a brief review of Sutton's equations is in order. No one should attempt to use the results without first reading the following sections.

2. THE EQUATIONS

Sutton derived his equations from statistical considerations of turbulent diffusion

(Received for publication 20 February 1964)

from an instantaneous point source. By integrating with respect to time, he obtained an equation for a continuous ground-level point source and this latter equation is the basis for generalizations to other source types.

The equation takes the general form

$$\frac{X}{Q} = \frac{1}{\pi \sigma_y \sigma_z \bar{u}} \exp \left\{ - \left[\frac{y^2}{2\sigma_y^2} + \frac{z^2}{2\sigma_z^2} \right] \right\}, \quad (1)$$

where X is the concentration at any point (x, y, z) , Q is the source strength, σ_y and σ_z are the standard deviations of the distances traveled by a particle in the crosswind (y) and vertical (z) directions, respectively. The downwind direction (x) is the direction in which the mean wind (\bar{u}) is blowing and does not appear explicitly. The values of σ_y and σ_z are, however, both functions of x , reflecting the fact that the cloud spreads both laterally and vertically as it travels away from the source. This equation is presumed valid for sources based at the ground in an atmosphere where the wind does not vary with height. Furthermore, it assumes that any tracer material which hits the surface "bounces" back into the air, that is, there is no deposition on the ground or other surface. It also assumes the crosswind and vertical distributions are Gaussian and that the downwind speed of translation (\bar{u}) is much greater than the downwind diffusion.

The problem then is to express σ_y and σ_z as functions of x and of atmospheric stability. Sutton presents some theoretical expressions of the form

$$2\sigma_y^2 = C_y^2 x^{2-n} \quad (2)$$

$$2\sigma_z^2 = C_z^2 x^{2-n}$$

where the C 's are functions of the gustiness and stability but not of x , and n is presumed related to the wind profile, which is in turn also a function of stability.

Equations (2) state that the downwind variation of σ , as represented by the term x^{2-n} , is the same for both the vertical and crosswind terms. However, Barad and Haugen² have presented an analysis of some data for continuous point sources (Project Prairie Grass³) which indicated that different values of n (referred to hereafter as n_y and n_z) are more appropriate. This concept was used in constructing the graphs presented here.

Since the problem of direct concern is an instantaneous line source rather than a continuous point source, Eq. (1) has to be transformed. Integration of Eq. (1) in

the crosswind plane from $y = -\infty$ to $y = +\infty$ gives the appropriate solution for a continuous line source. Then, if the concentration X is replaced by the total dosage D (units of quantity times time per unit volume), and the source strength Q is taken as quantity per unit length of release, a solution for an instantaneous line source is achieved. Finally, by referring to the method of images,¹ the equation can be made appropriate for a source whose height above ground is h . The final equation is then

$$\frac{D}{Q} = \frac{2}{\sqrt{\pi} C_z \bar{u} x^{(2-n_z)/2}} \exp \left[-\frac{h^2}{C_z^2 x^{2-n_z}} \right] \quad (3)$$

This equation then gives the value of D/Q , at ground level, as a function of the source height h , the wind speed \bar{u} , and the downwind distance x , provided the parameters C_z and n_z can be specified.

3. ESTIMATION OF PARAMETERS

Haugen, Barad, and Antanaitis⁴ have presented values of the diffusion parameters C_y , C_z , n_y , and n_z , based upon a careful analysis of the Prairie Grass data. As stated above, these parameters are functions of stability. Haugen *et al.*, chose the Stability Ratio (SR) as the quantitative measure of stability. This parameter is defined as

$$SR = \frac{T_4 - T_{0.5}}{\bar{u}_2^2} \times 10^5 \text{ } ^\circ\text{C sec}^2 \text{ cm}^{-2} \quad (4)$$

The subscripts refer to the height above ground, in meters, at which the temperature (T) and wind speed (\bar{u}) were measured. This quantity is negative in lapse situations and positive in inversion situations.

The appropriate values of the parameter for various stability classes as found by Haugen *et al.* are given in Table 1. (The integration of Eq. (1) with respect to y eliminated C_y and n_y . These values will be needed later in this paper, however, and are presented here for convenience.)

The values appearing in Table 1 are those used in constructing the graphs. Obviously, to use these graphs, one must first be able to ascertain the proper stability category. When measurements of temperature difference and wind speed at the appropriate levels for determining the stability ratio are not available, the following may be useful as a rough guide in estimating the proper stability class.

Based on the experience at Project Prairie Grass, during daylight hours one

TABLE 1.

		C_z	n_z	C_y	n_y
Stability Class	Range of SR	(meters) $n_z/2$		(meters) $n_y/2$	
very unstable	< -0.45	0.002	-1.20	0.38	0.20
moderately unstable	-0.45 to -0.20	0.02	-0.40	0.38	0.30
neutral	0.20 to 0.20	0.07	0.10	0.38	0.50
moderately stable	0.20 to 0.45	0.07	0.20	0.38	0.65
very stable	> 0.45	0.07	0.30	0.38	0.80

would expect to find very unstable conditions with clear skies and surface winds less than 10 knots; neutral conditions would be found with overcast skies and wind speeds in excess of 15 knots. If neither of these conditions is met one would find moderately unstable conditions during the day. At night one would expect very stable conditions with clear skies and wind speeds below 7 knots; neutral conditions with overcast skies and wind speeds greater than 15 knots; otherwise one would expect moderately stable conditions. In addition, near sunrise and sunset one expects a period of neutral conditions, regardless of wind and cloud conditions. It should be emphasized that the terms "very" and "moderately" are based on the conditions during Prairie Grass. Very few trials were made with surface winds less than 3 knots. Therefore one might find that, with very low wind speeds, the graphs for very unstable and very stable are not representative.

A question concerning the wind speed to use in entering the graphs naturally arises. It is well known that the wind is not constant with height as the theoretical development presupposes. Probably, the best wind speed to use would be an average between the surface wind speed and the speed at the release height.

4. ACCURACY OF EQUATIONS

It must be stressed that values of the parameters used in this study have been obtained by a double averaging. They were derived from continuous source data which is, in effect, an average over a large number of instantaneous sources. Also, the values of the parameters represent median values derived from a number of separate continuous source emissions. This means that Eq. (3), with these parameters, represents what would be expected as an average over a number of instantaneous releases in the same stability conditions. Equation (3) cannot be presumed to be more than an educated guess for any particular release.

No data from elevated sources are available in sufficient quantity or quality to determine the accuracy of the graphs in Appendix A; only subjective estimates of their accuracy can be made. One must keep in mind that the parameters were obtained from data in a particularly simple geographic location. Furthermore, the graphs are based on an assumed Gaussian distribution of crosswind and vertical concentration. The assumption of a Gaussian distribution seems to be a good way of representing the crosswind distribution from a point source but there is evidence^{5,6} that the vertical distribution may be better represented by some other form. However, neither of these references give sufficient information from which the appropriate diffusion parameters may be calculated. Until more work is available, it is best to use the Gaussian distribution.

In particular applications, one would expect the graphs to be most accurate near the distance of the peak dosage and when the source is close to the ground. At distances greater than a few miles from the source, one would expect deterioration of the results because, at these distances, scales of atmospheric motions larger than those considered in ordinary diffusion equations may become important. Between the elevated source and the maximum dosage the lines of D/Q vs. distance are so steep that a slight shift in the lines could result in a difference of D/Q of several orders of magnitude.

In summary, then, one might expect that, around the maximum value of D/Q , the graphs would provide estimates of D/Q to within a factor of 4 about 2/3 of the time and within an order of magnitude almost all the time. The estimated distance from the source to the maximum D/Q should be accurate to within a factor of 2. These statements are based on subjective judgments and assume an accurate determination of the source height, the wind speed, and the stability class.

Another point which must be stressed is the relation between the wind direction and the direction of the release line. The derivation of Eq. (3) requires that the wind direction must be at right angles to the release line. In practice it appears the results would not differ sufficiently from those predicted here if the wind direction were between 80° and 100° to the release line. Barad, Haugen, and Fuquay⁷ have presented the equation necessary to consider all angles between wind and release line as well as finite lengths of the release line. However, this equation can, in general, only be solved by digital methods. Solutions of this equation would be quite valuable and should be undertaken.

5. THE LENGTH OF THE RELEASE LINE

The question of how long a release line must be to be considered effectively infinite is not easy to determine. The farther away from any finite source the more that source appears as a point. Conversely, the closer one is to the center of a finite

line source the more it appears as an infinite line source. Thus, one would expect some region down wind of a finite line source to be unaffected by the finite length of the line. This concept is illustrated schematically in Figure 1. The hatched area is the region down wind of release line AB in which the finite length of AB is immaterial for diffusion considerations. The problem is to determine the boundary of this region.

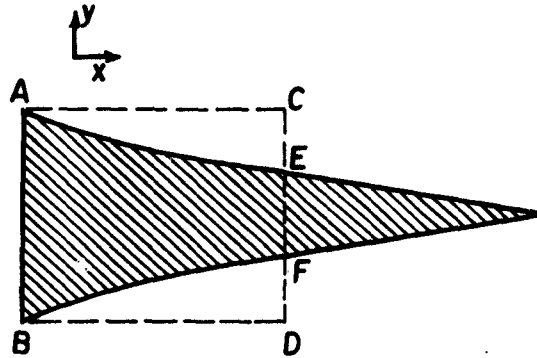


Figure 1

Consider lines AC and BD normal to AB and line CD parallel to AB. A reasonable and probably conservative assumption can be made which should provide sufficient information for planning purposes. This assumption is that CE and FD are equal to twice the crosswind standard deviation σ_y . Then if the length of the release line AB is taken as L and the length of the line EF is taken as L_0 , it follows from the geometry of Figure 2 that

$$\frac{L}{2} - \frac{L_0}{2} = 2\sigma_y \quad (5)$$

Substituting for σ_y from Eq. (2)

$$L - L_0 = 2^{3/2} C_y x^{(2-n_y)/2} \quad (6)$$

The value of C_y is not dependent on stability (see Table 1) and is equal to 0.38 (meters) $^{n_y/2}$. Thus with sufficient accuracy Eq. (6) may be written, if L, L_0 , and x are measured in meters,

$$L - L_0 = x^{1-n_y} \quad (7)$$

where the n_y values are given in Table 1. Therefore, if two of the three lengths in Eq. (7) can be prescribed, the third can be found. Figure 2 shows graphs of this equation for values of x out to one mile for the five stability conditions used in Appendix A, the lengths having been converted to feet. Appendix B gives an example of the use of this graph in a hypothetical planning problem.

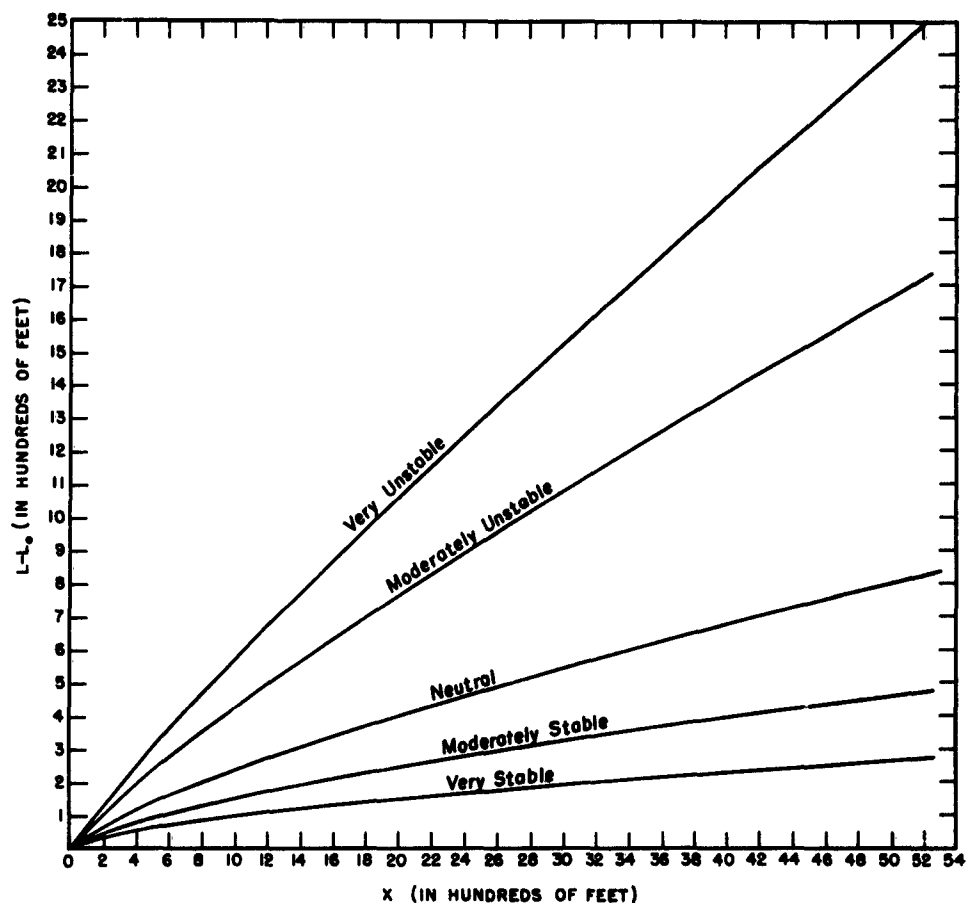


Figure 2

Acknowledgments

We wish to express our appreciation of the efforts of Miss Patricia Kelly of Regis College, who handled the computational work.

References

1. O.G. SUTTON, Micrometeorology, McGraw-Hill (1953).
2. M.L. BARAD, and D.A. HAUGEN, A preliminary evaluation of Sutton's hypothesis for diffusion from a continuous point source, J. Meteorol., 16(No. 1):16-20 (1957).
3. M.L. BARAD, Ed., Project Prairie Grass, a Field Program in Diffusion, (2 Vol). Geophy. Res. Paper No. 59 (1958).
4. D.A. HAUGEN, M.L. BARAD, and P. ANTANAITIS, Values of parameters appearing in Sutton's diffusion models, J. Meteorol., 18(No. 3):368-372 (1961).
5. W.P. ELLIOTT, The vertical diffusion of gas from a continuous source, Int. J. of Air and Water Poll., 4:33-46 (1961).
6. F. PASQUILL, Atmospheric Diffusion, D. Van Nostrand Co., (1962).
7. M.L. BARAD, D.A. HAUGEN, and J.J. FUQUAY, A Diffusion Deposition Model for In-Flight Release of Fission Fragments, Air Force Surveys in Geophysics No. 123 (1960).

Appendix A

This Appendix contains graphs of dosage divided by line source strength (D/Q) in minutes per square foot vs. distance from the release line (x) in feet. For each of the five stability categories listed in Table 1, graphs of D/Q vs. x are given for assumed release heights of 0, 50, 100, 150, 200, 250, 300, 400, and 500 feet above ground. Thus there are 45 separate graphs. Each graph shows 4 lines corresponding to solutions for transport wind speeds of 5, 10, 20, and 30 knots. Estimates for other wind speeds can be found by multiplying the value of D/Q , at 10 kt, by the ratio 10 kt/actual wind speed. (For further details, consult the test.)

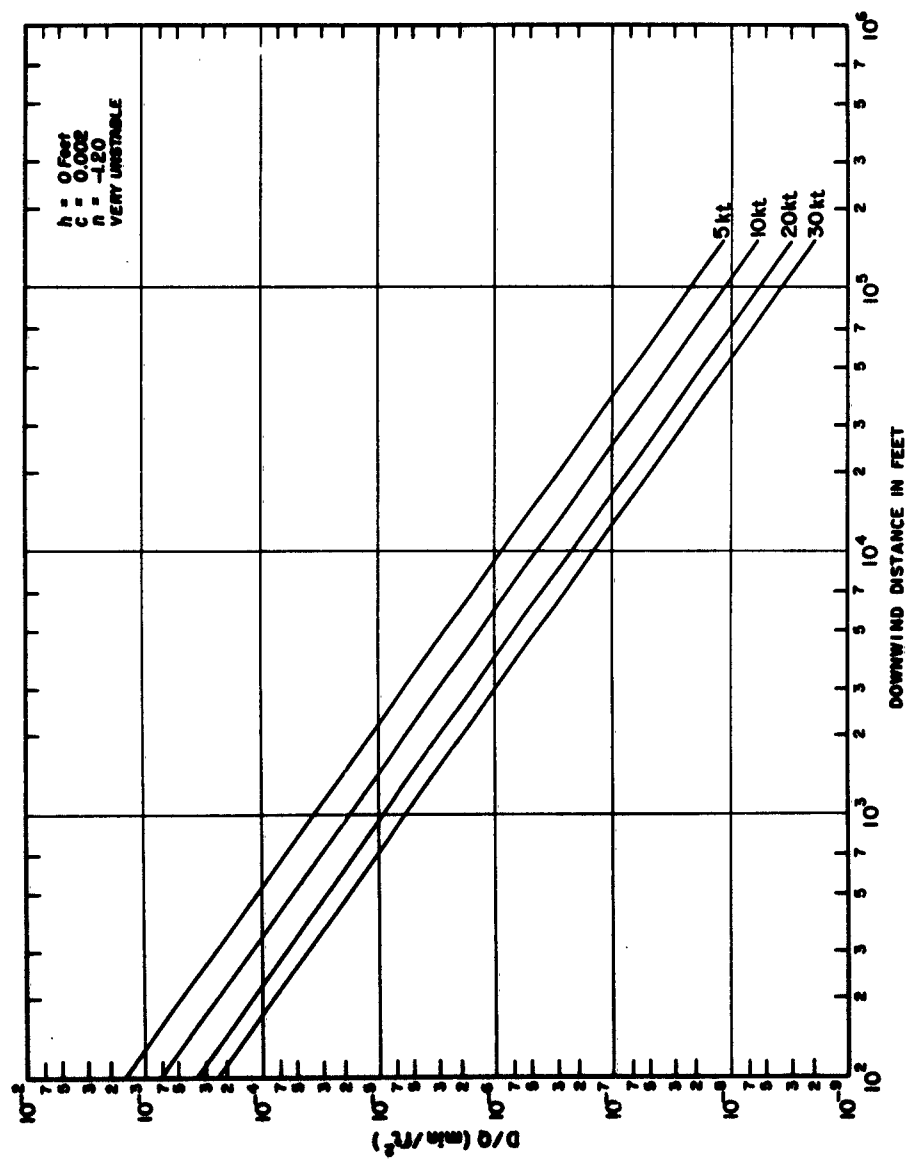


Figure A1

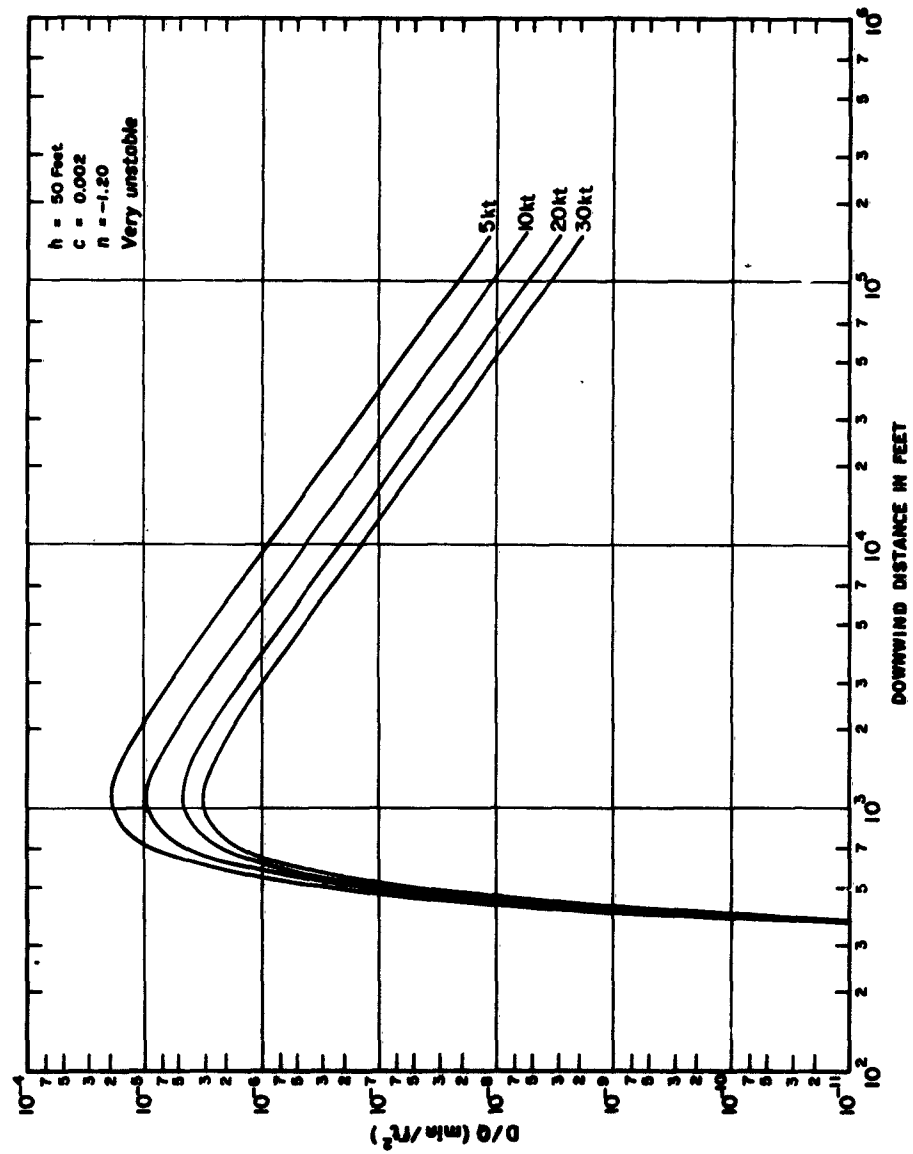


Figure A2

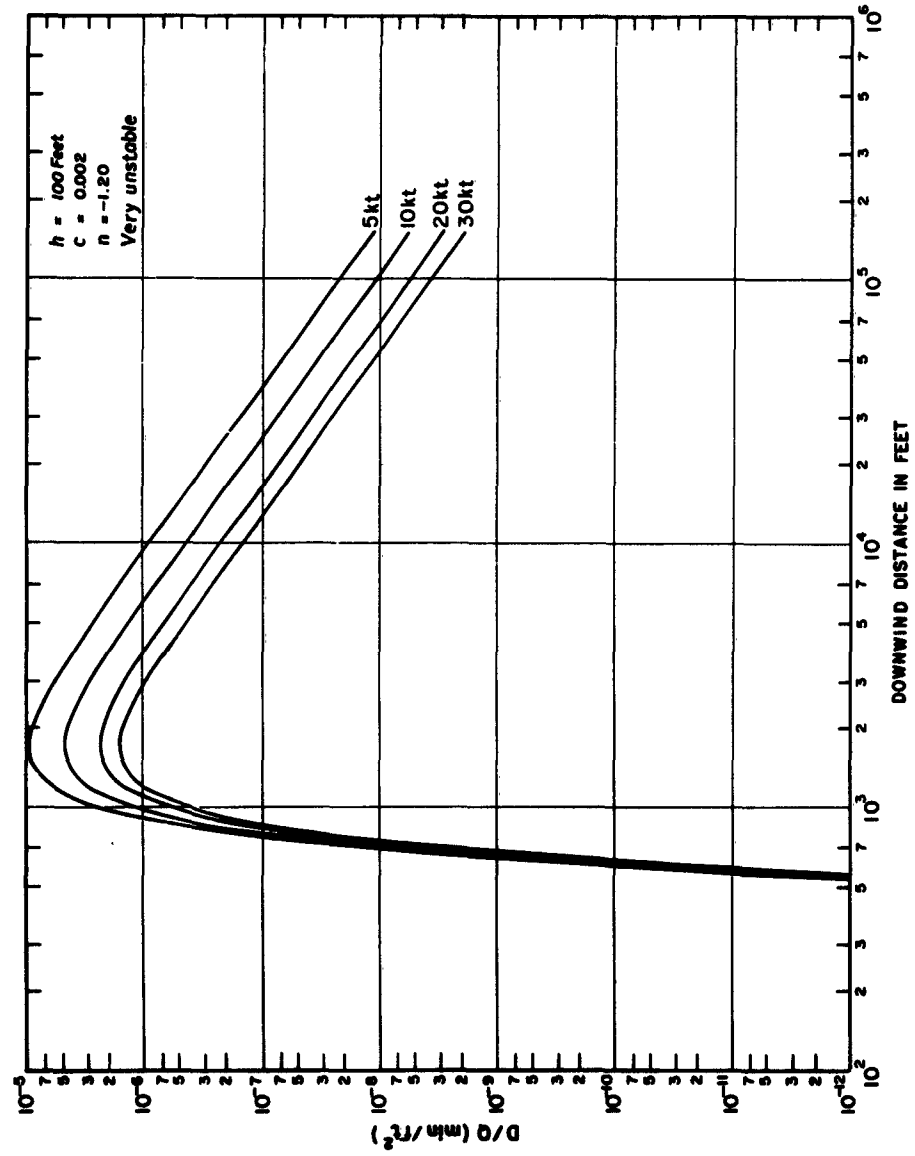


Figure A3

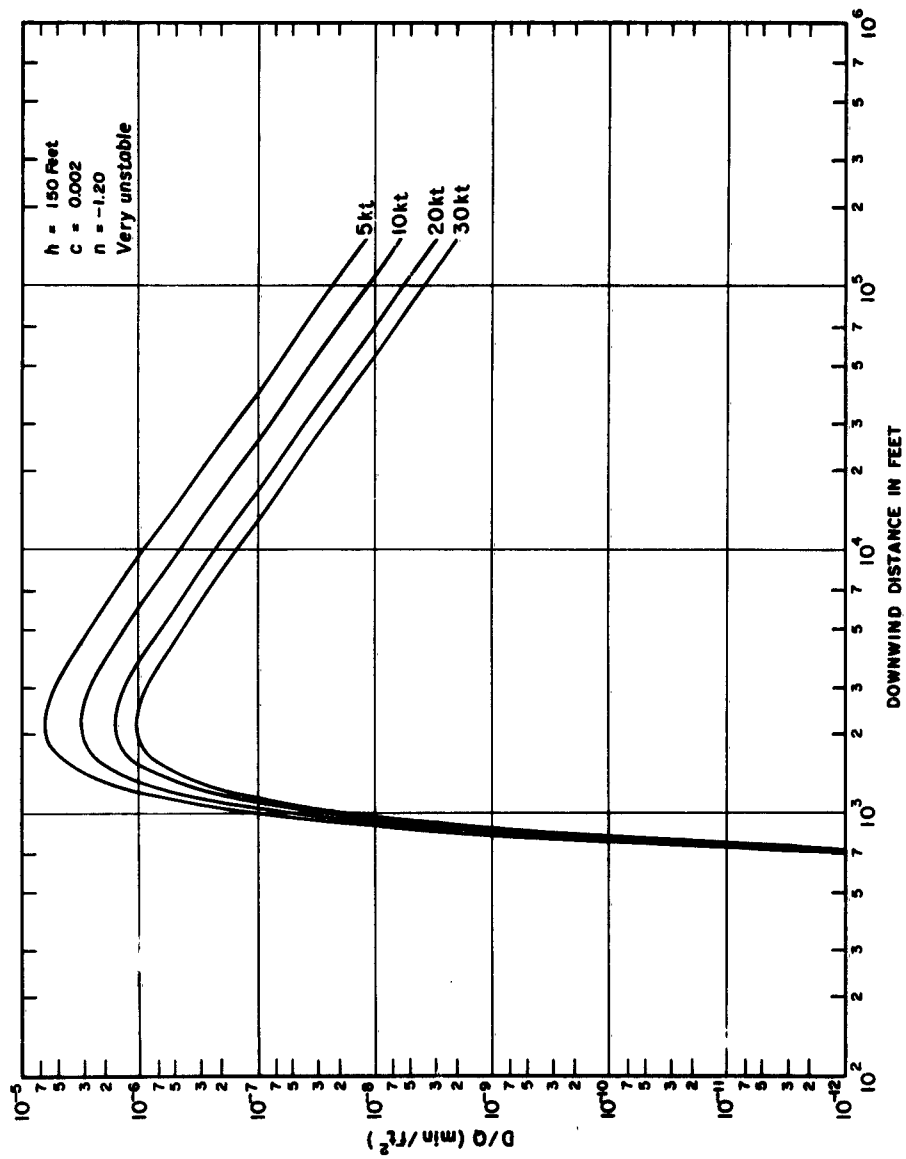


Figure A4

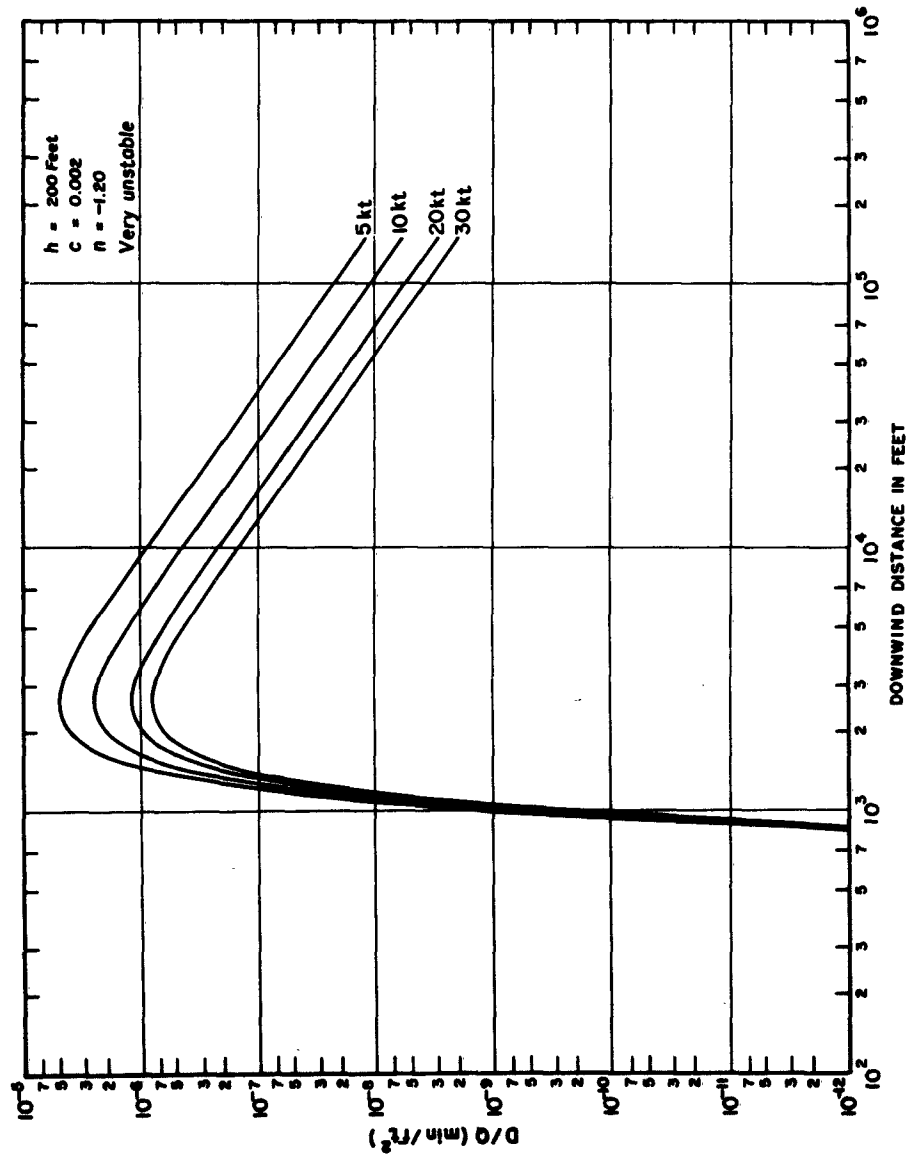


Figure A5

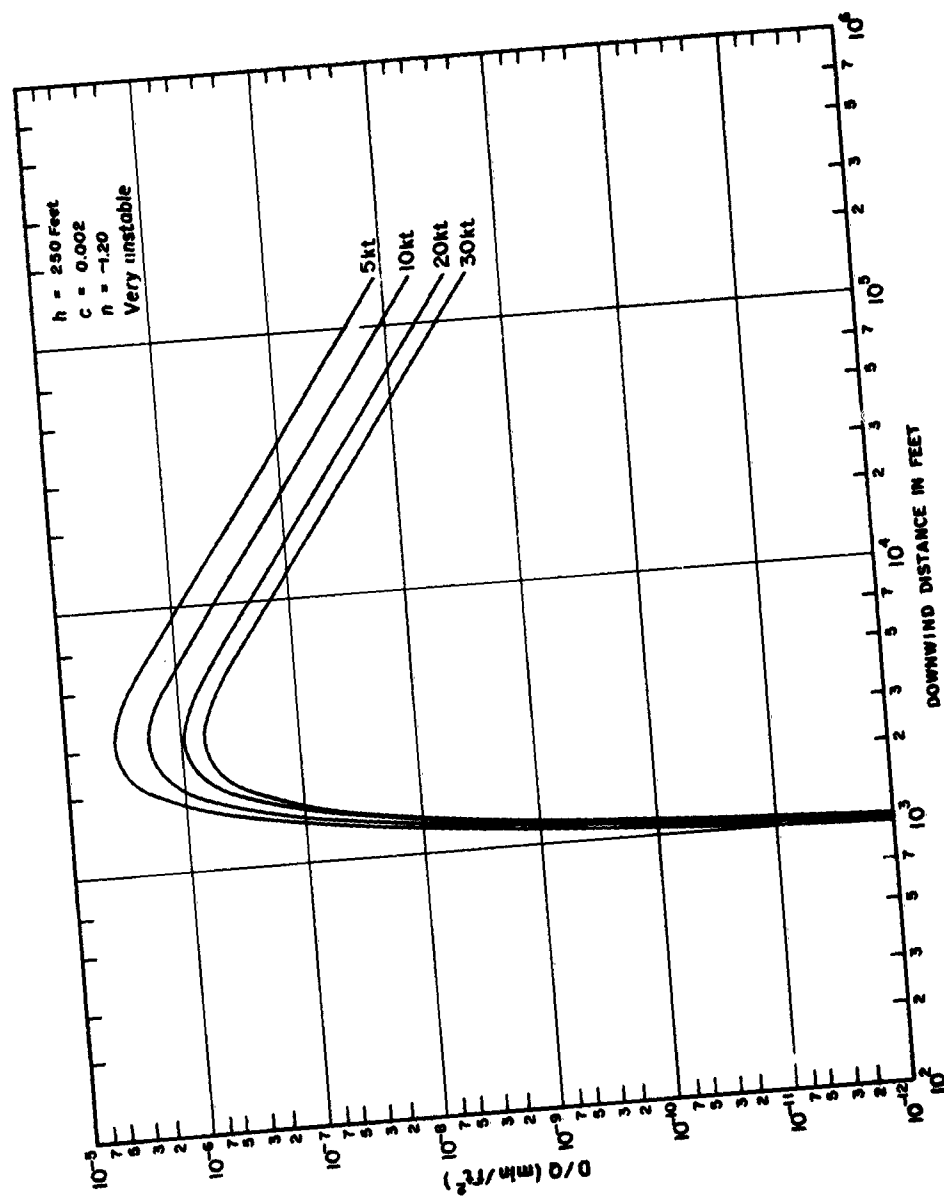


Figure A6

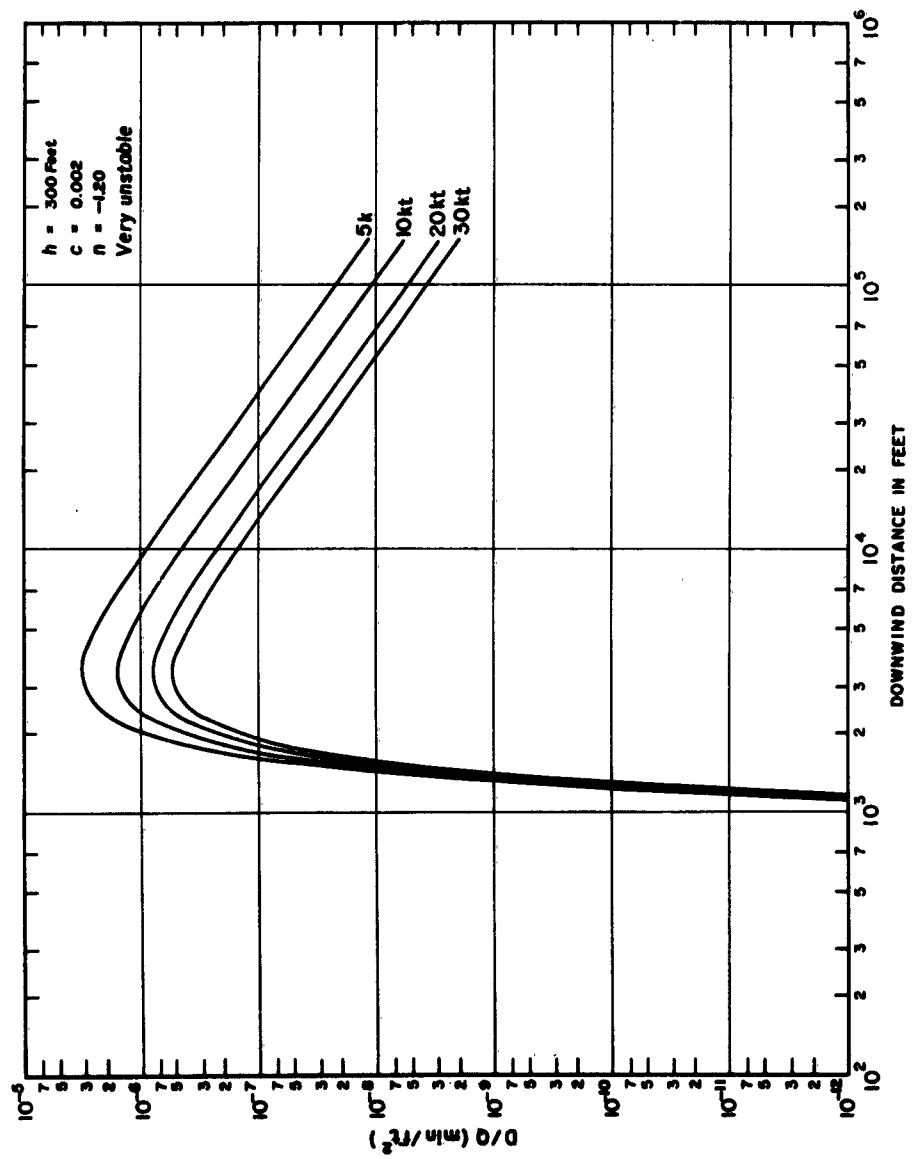


Figure A7

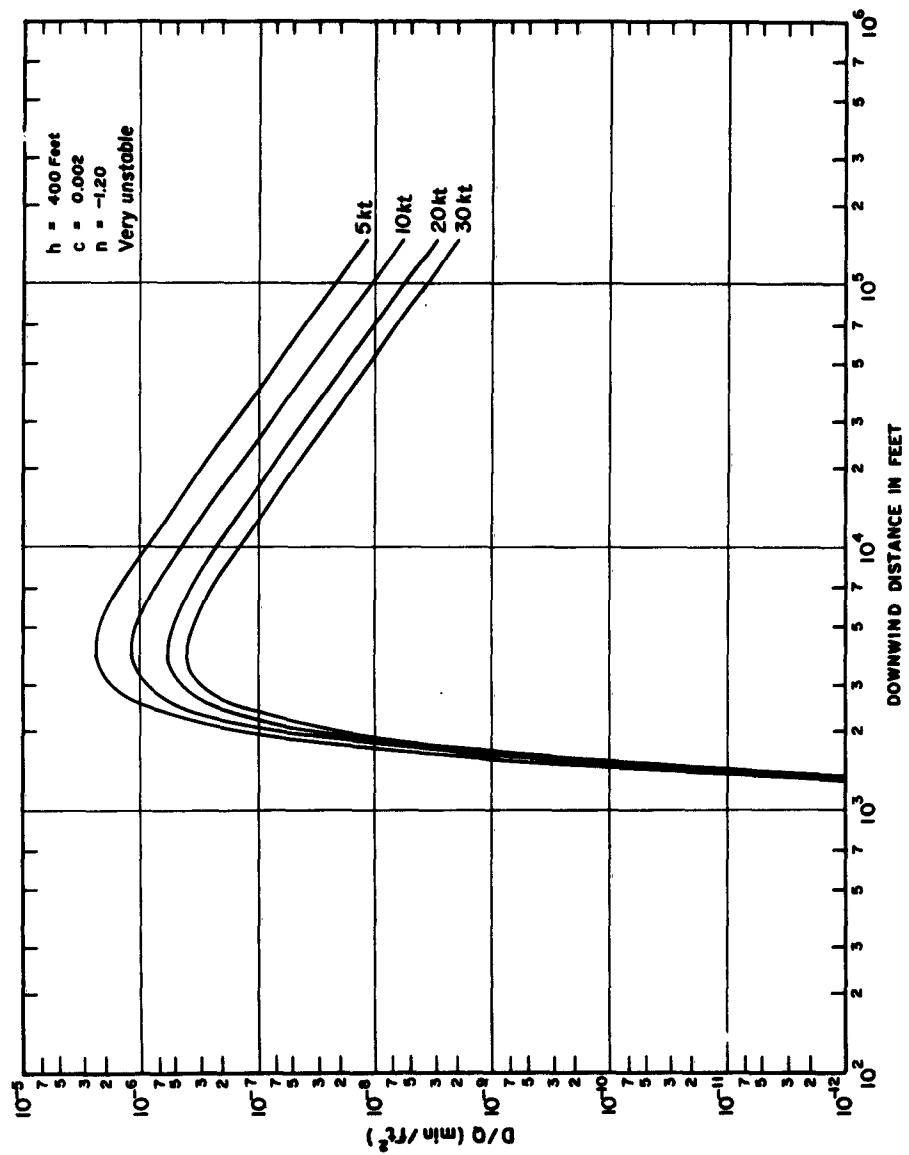


Figure A8

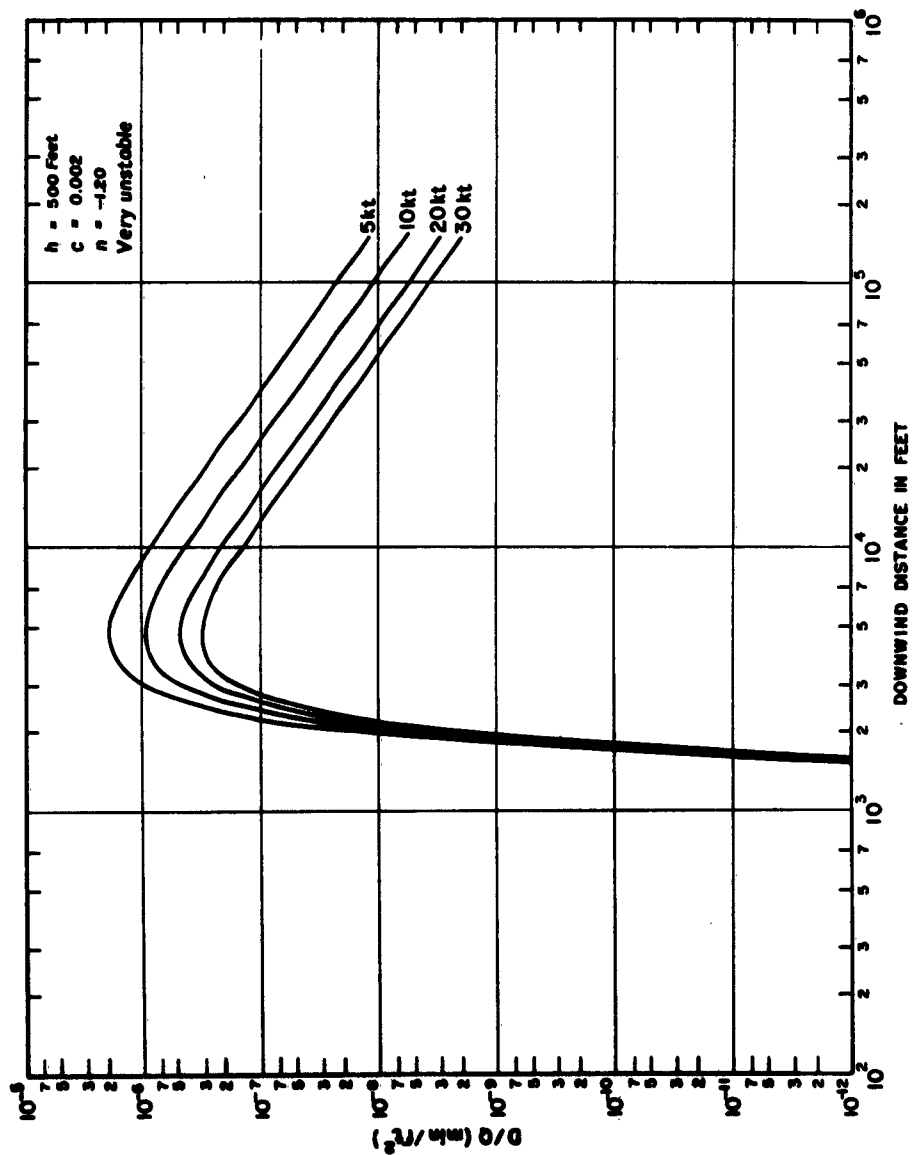


Figure A9

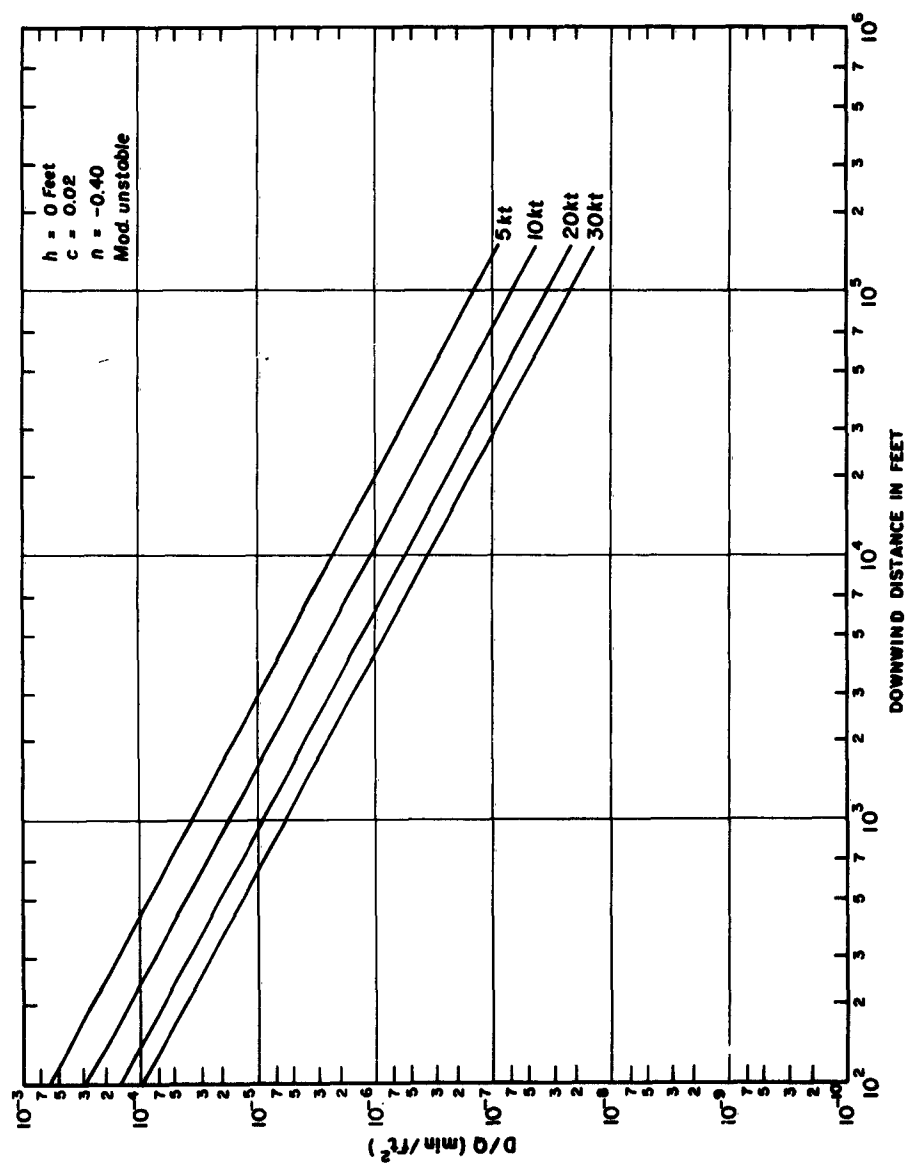


Figure A10

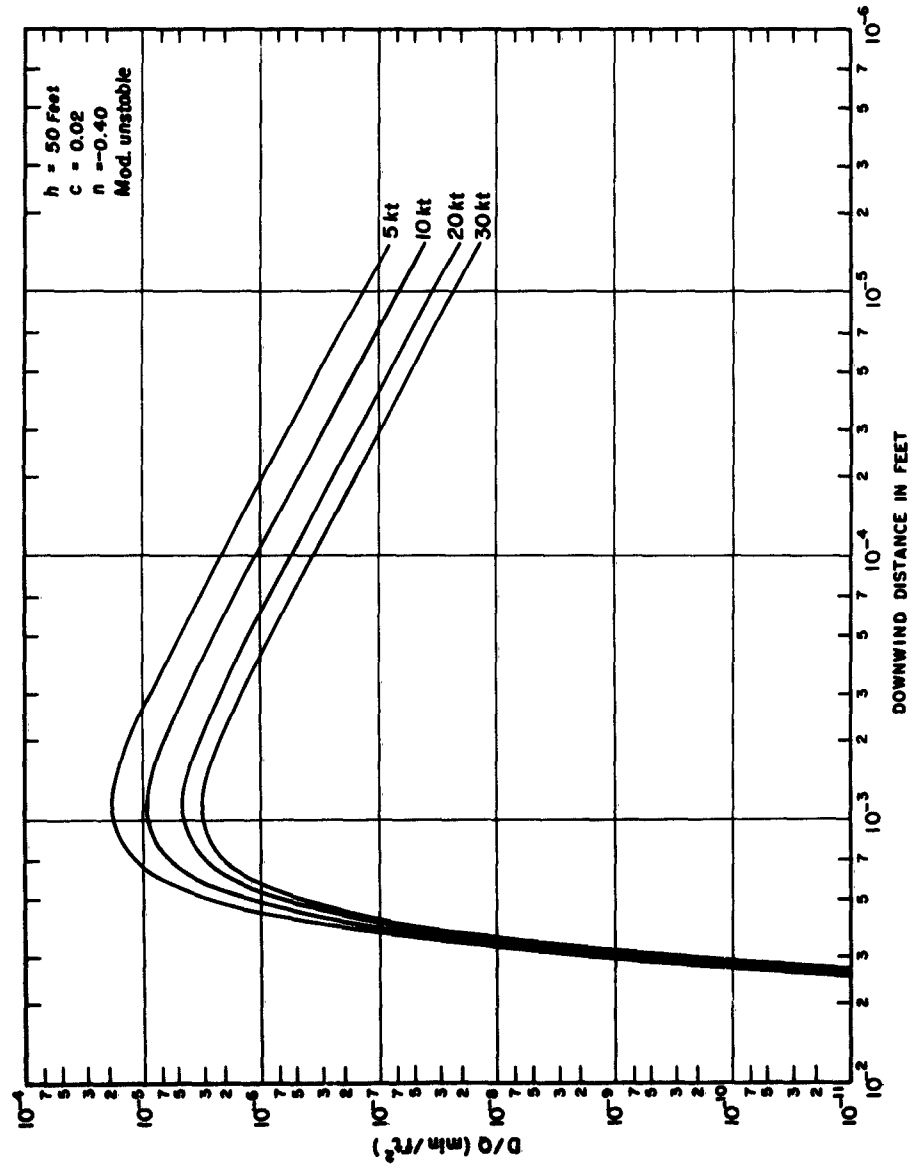


Figure A11

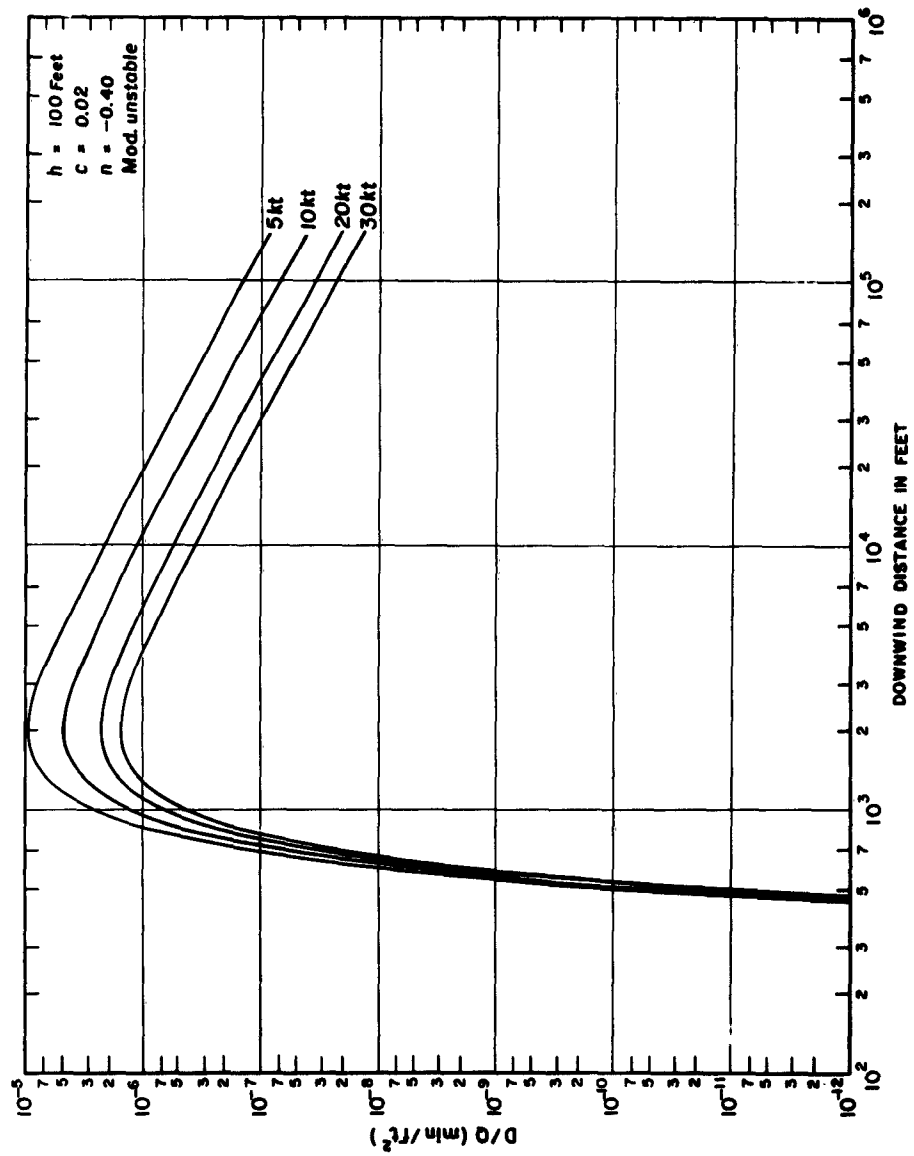


Figure A12

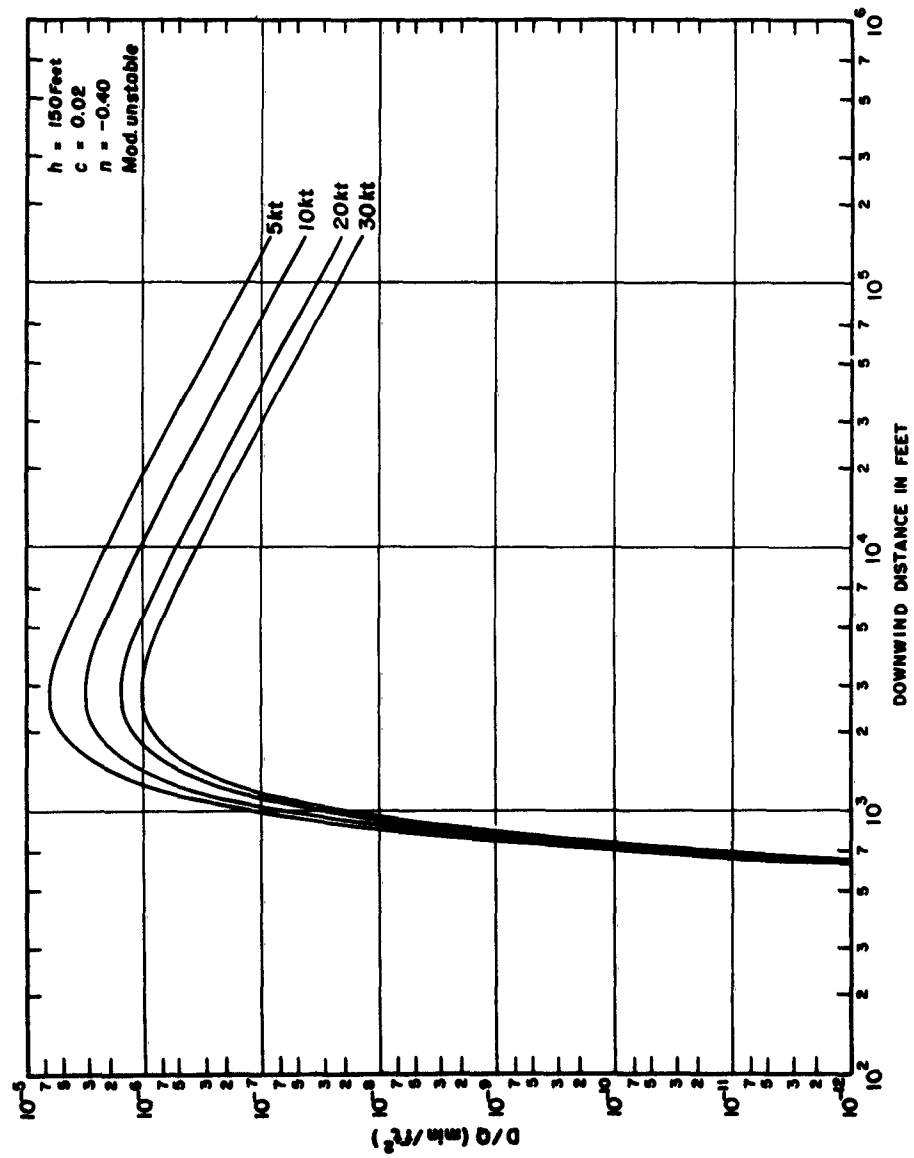


Figure A13

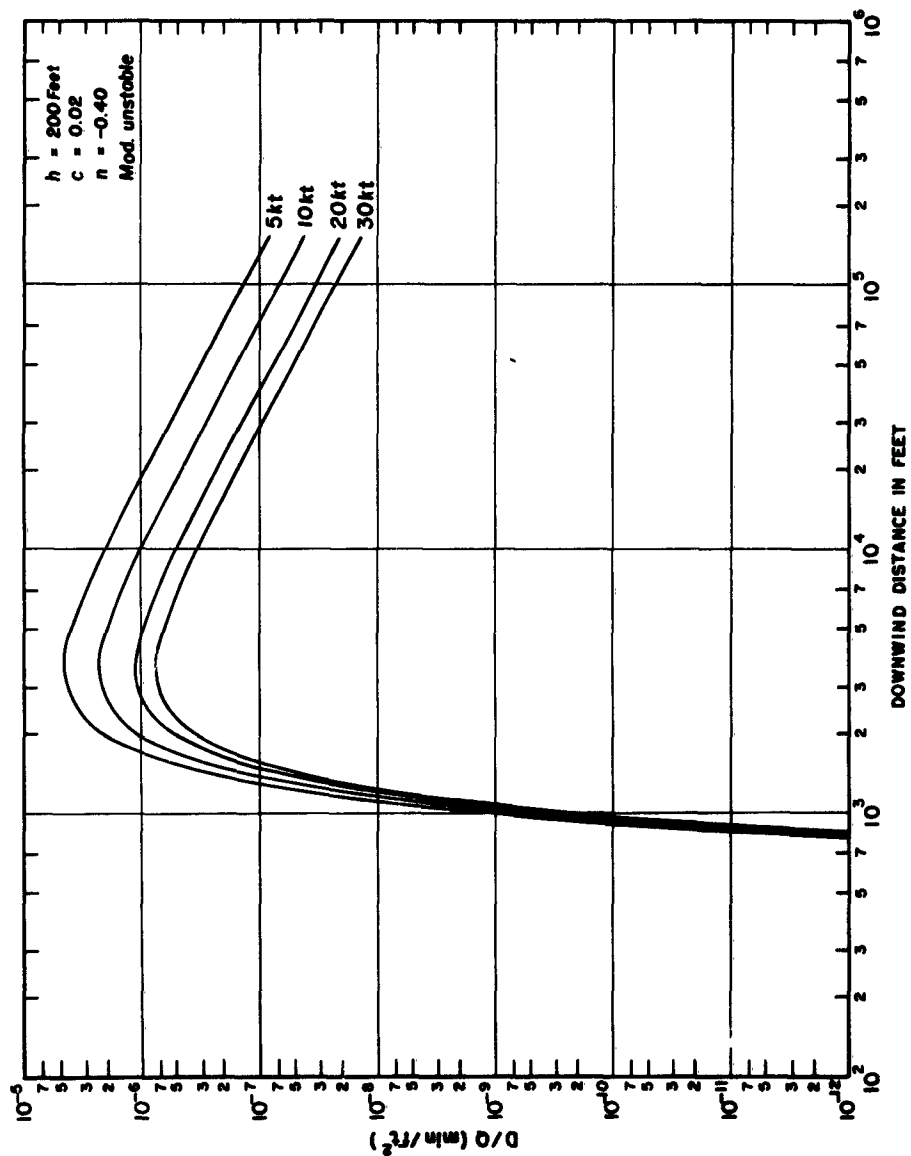


Figure A14

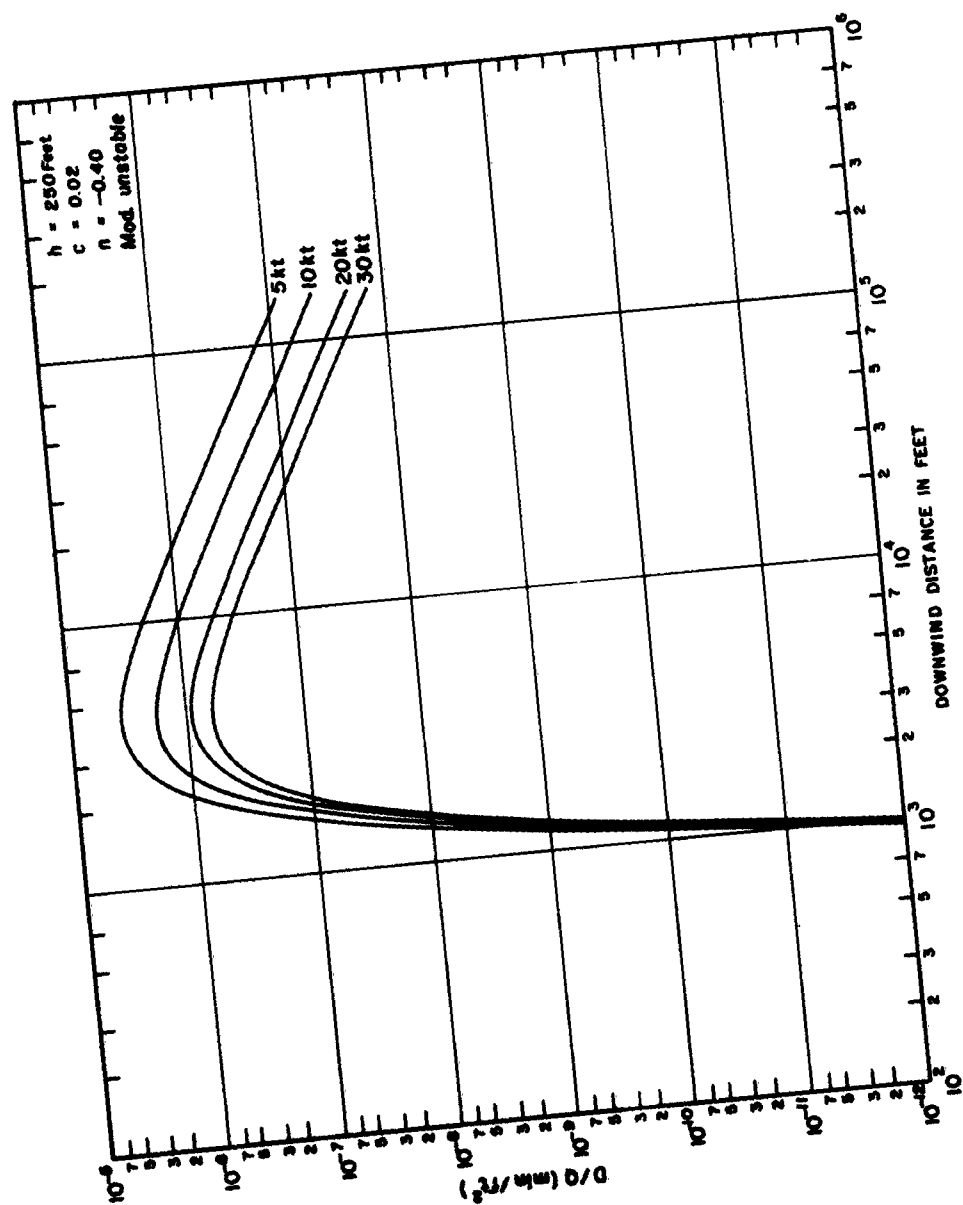


Figure A15

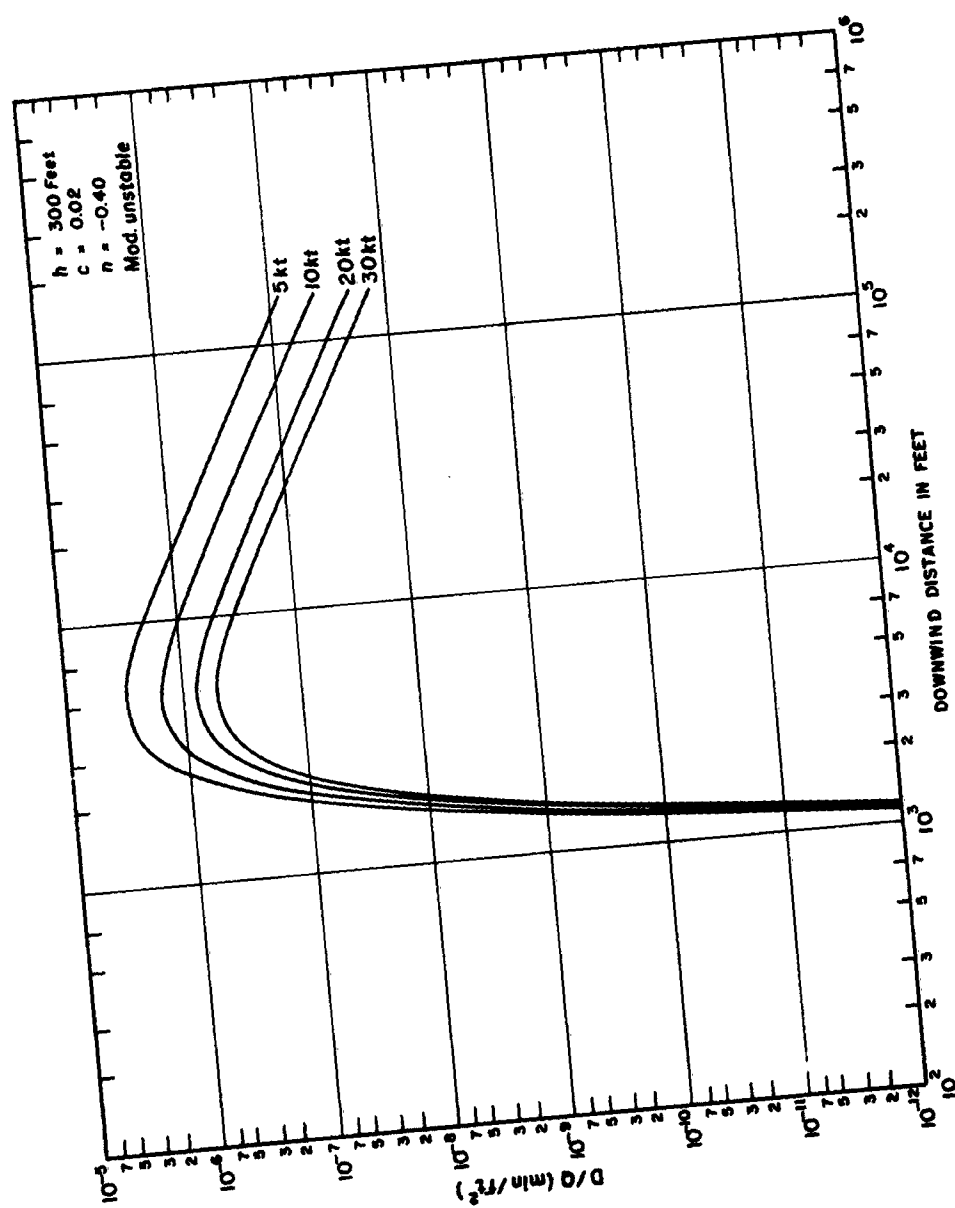


Figure A16

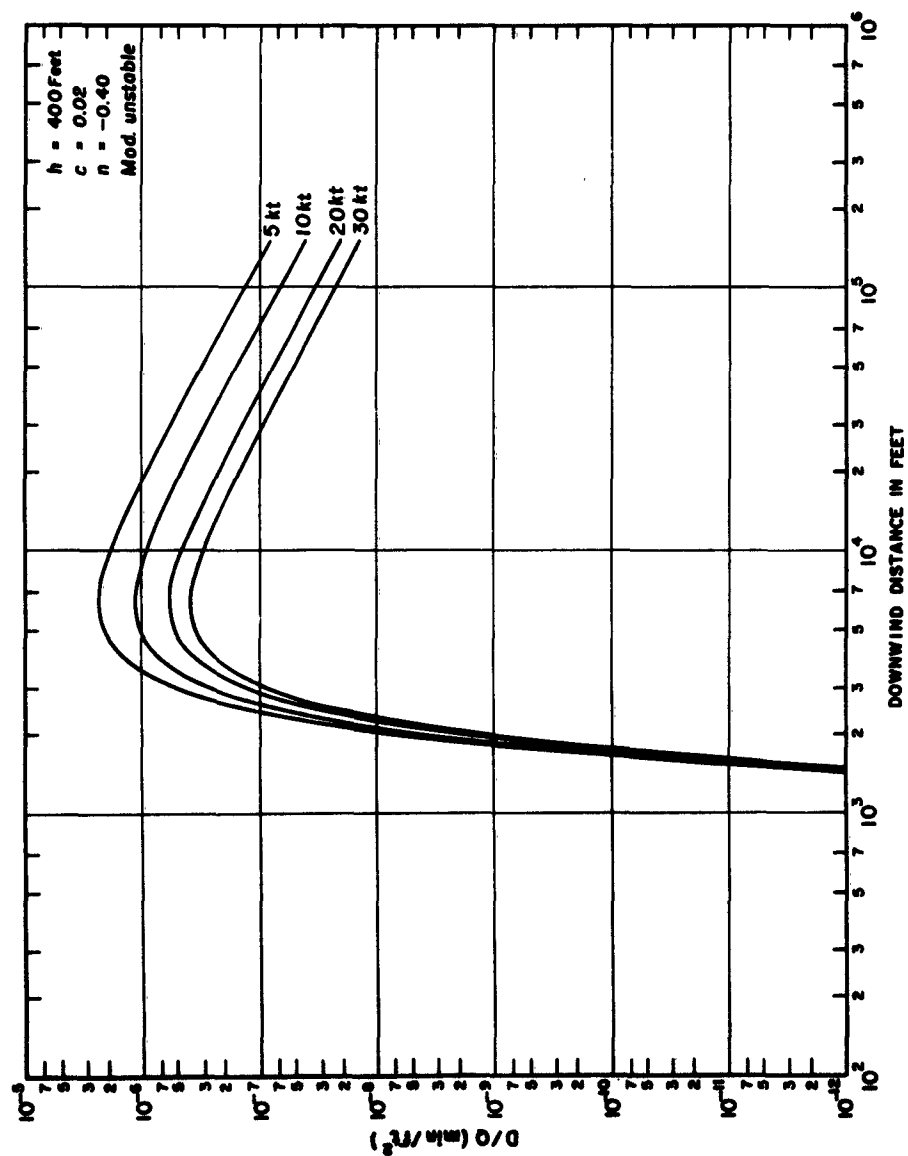


Figure A17

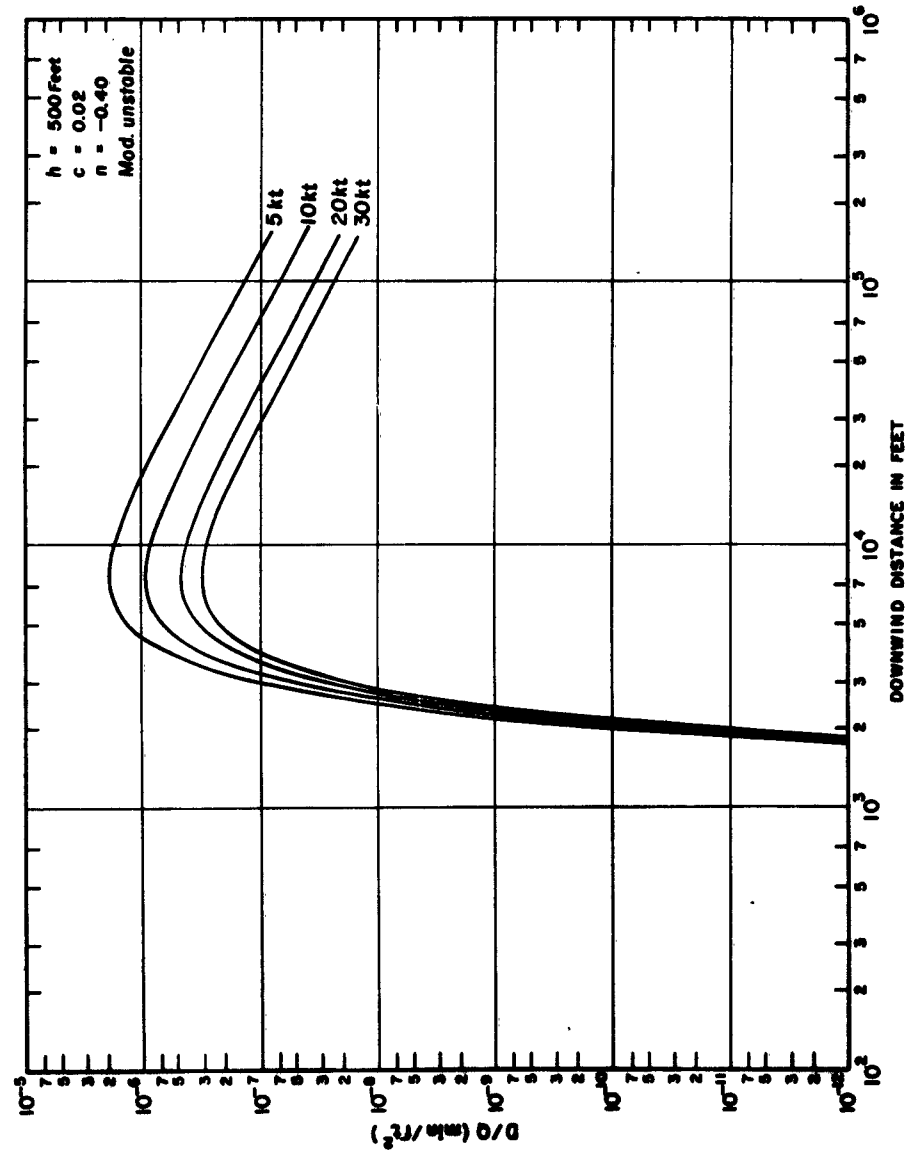


Figure A18

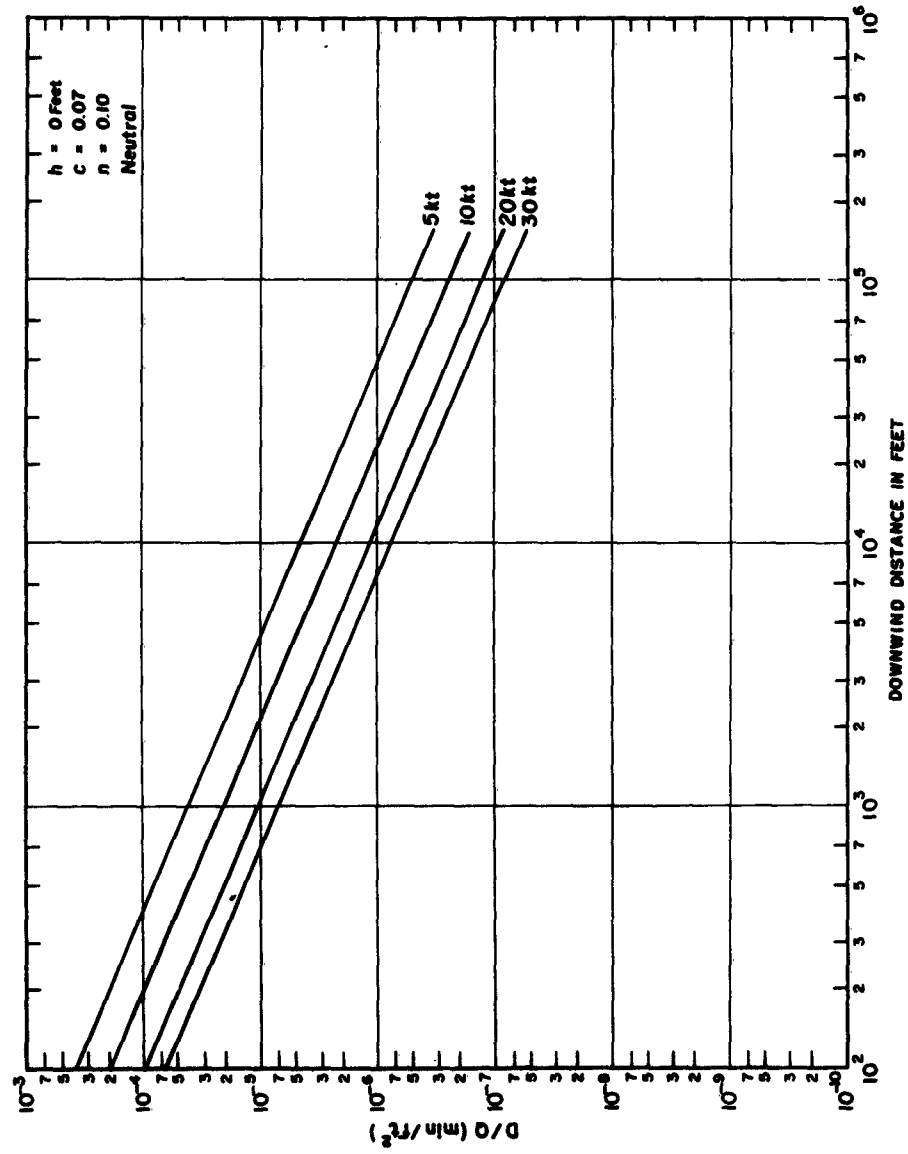


Figure A19

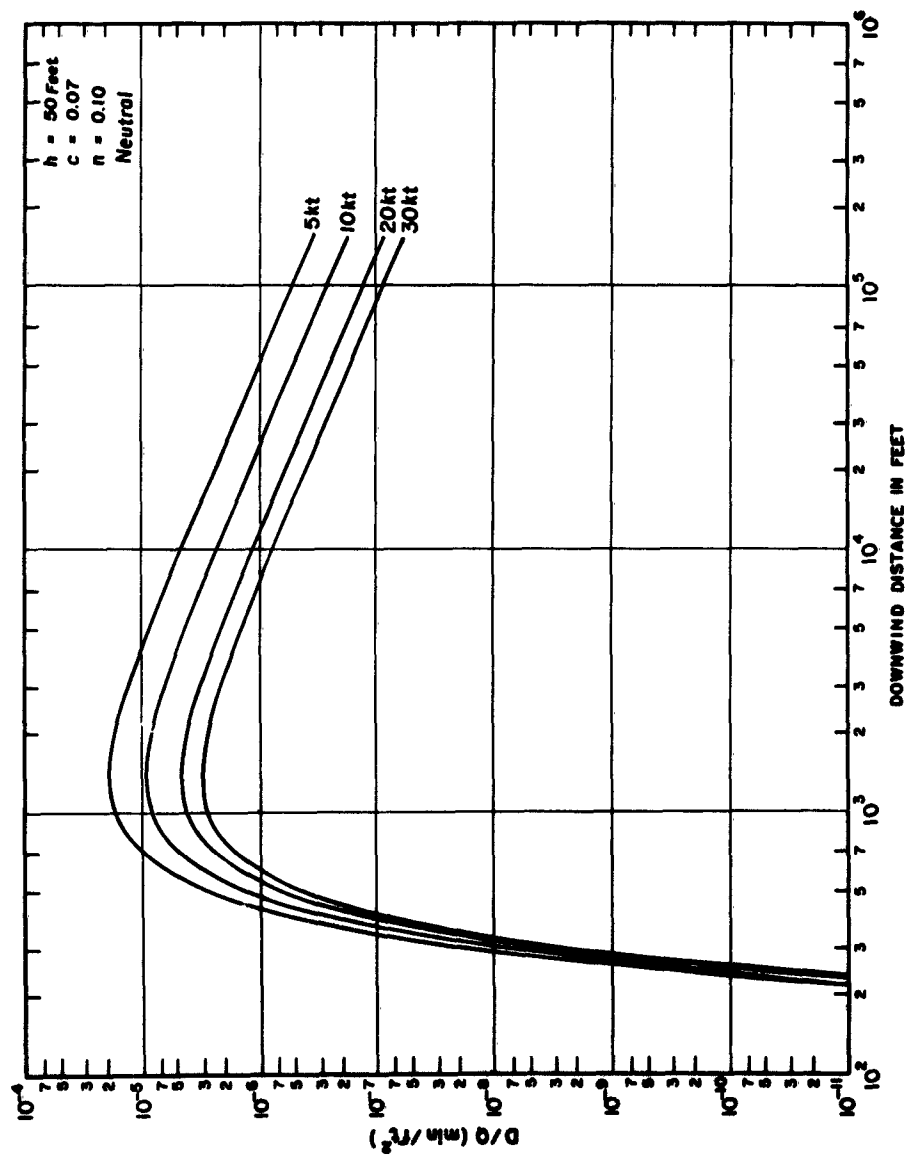


Figure A20

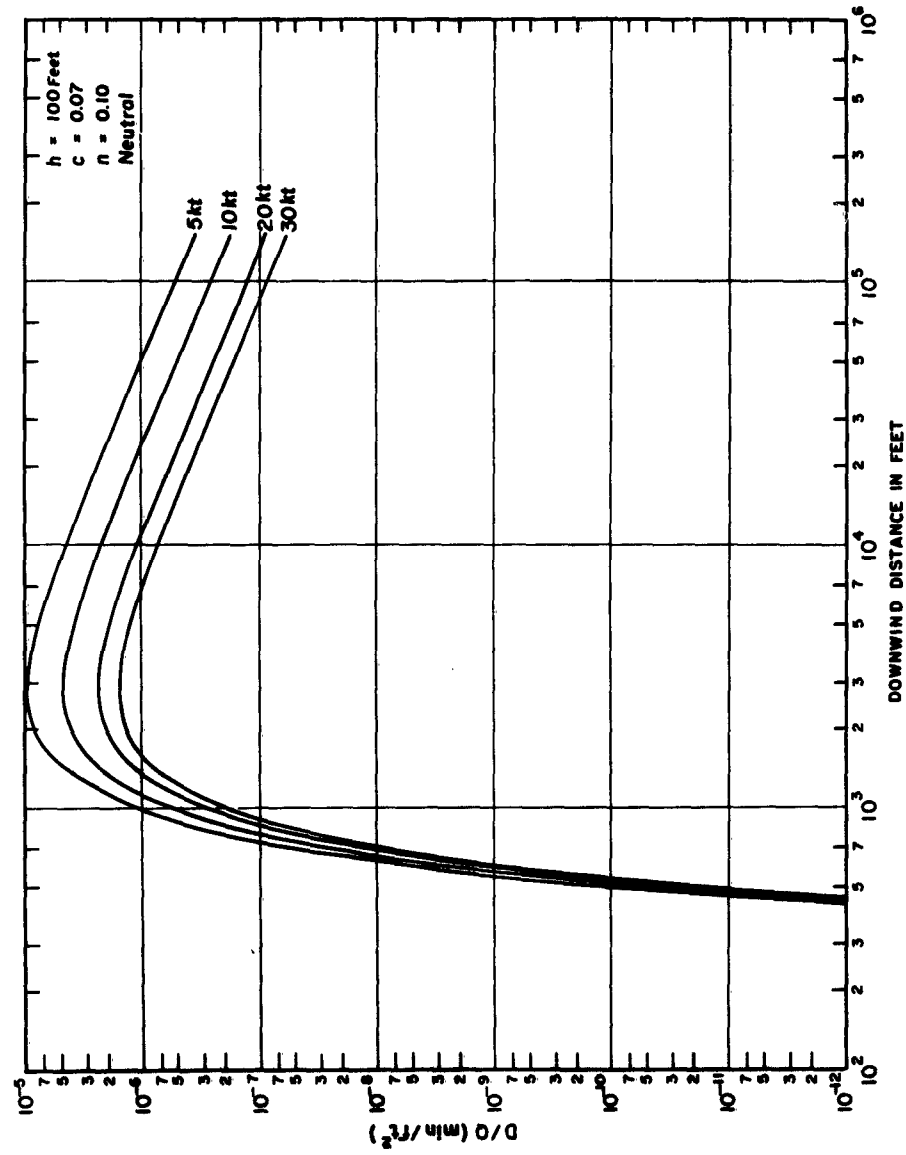


Figure A21

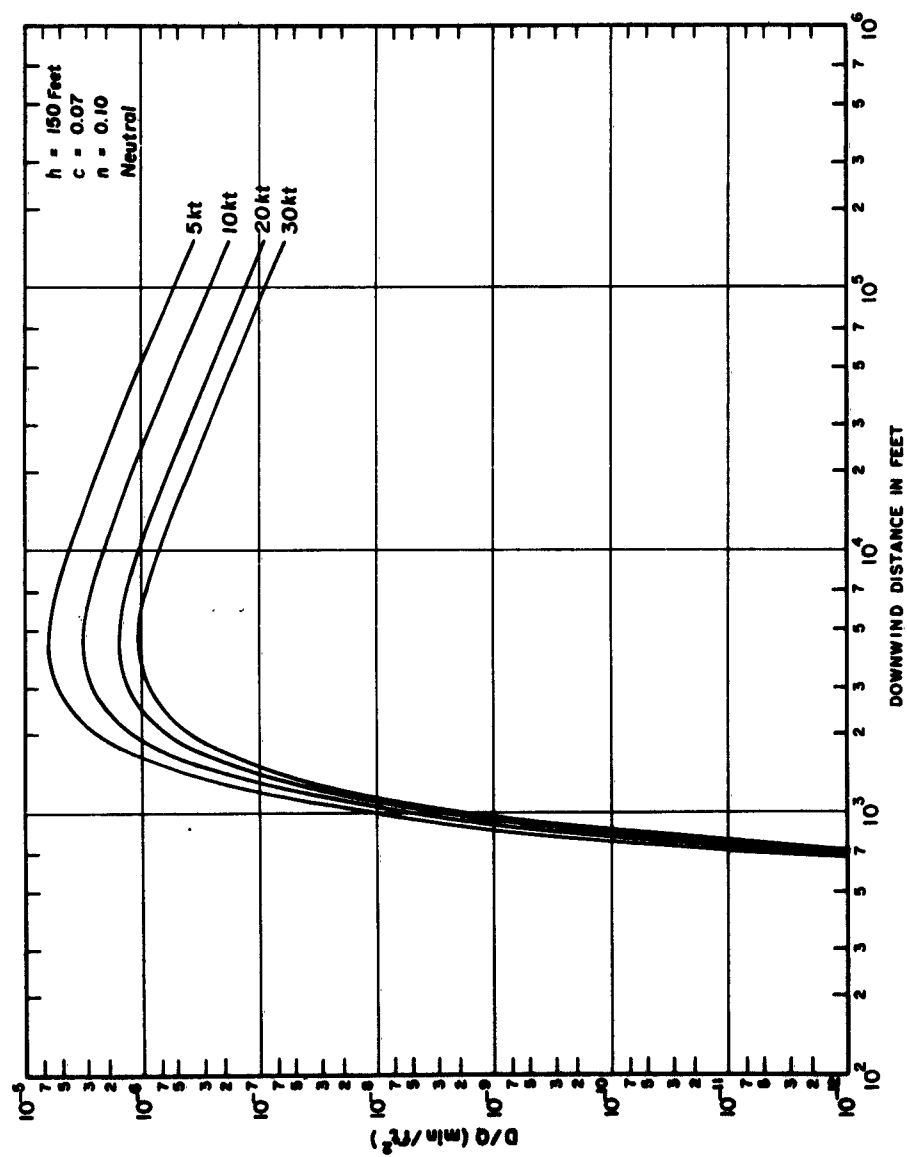


Figure A22

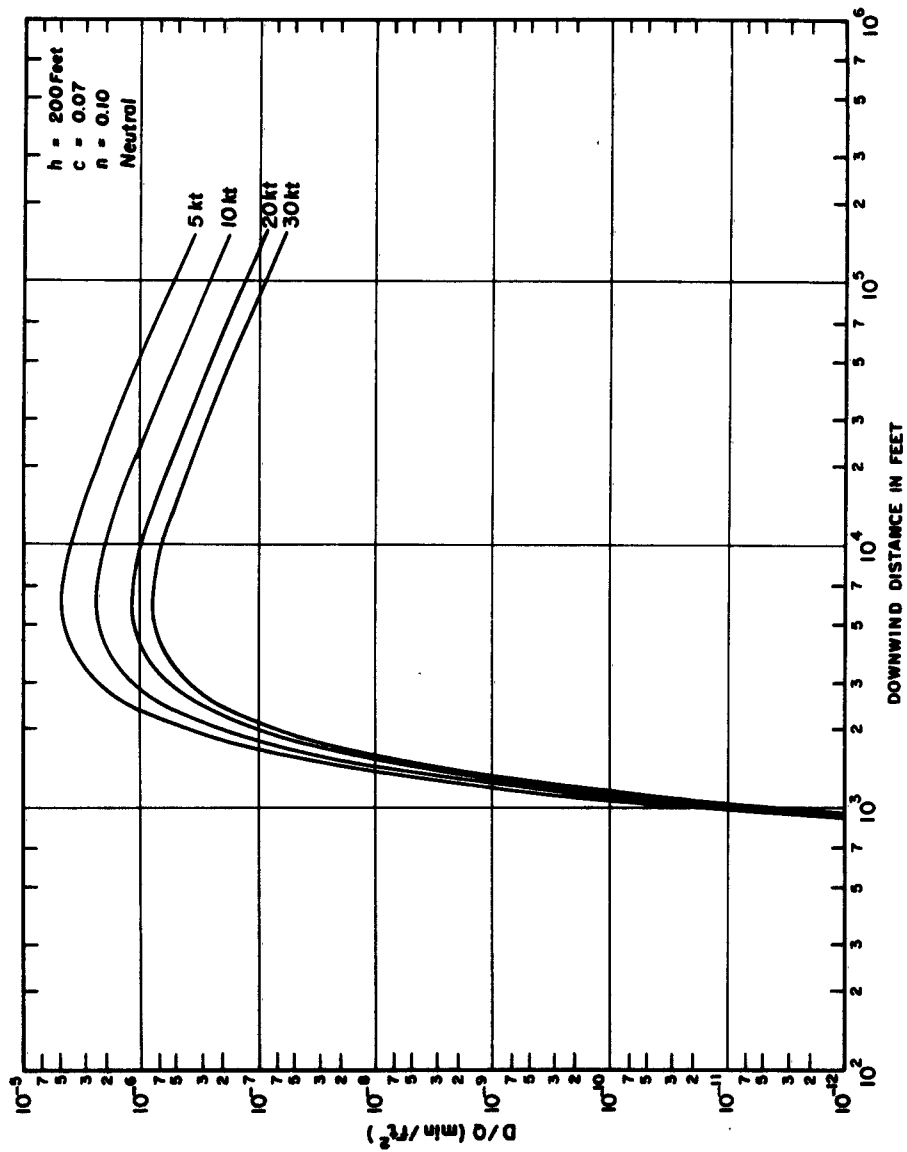


Figure A23

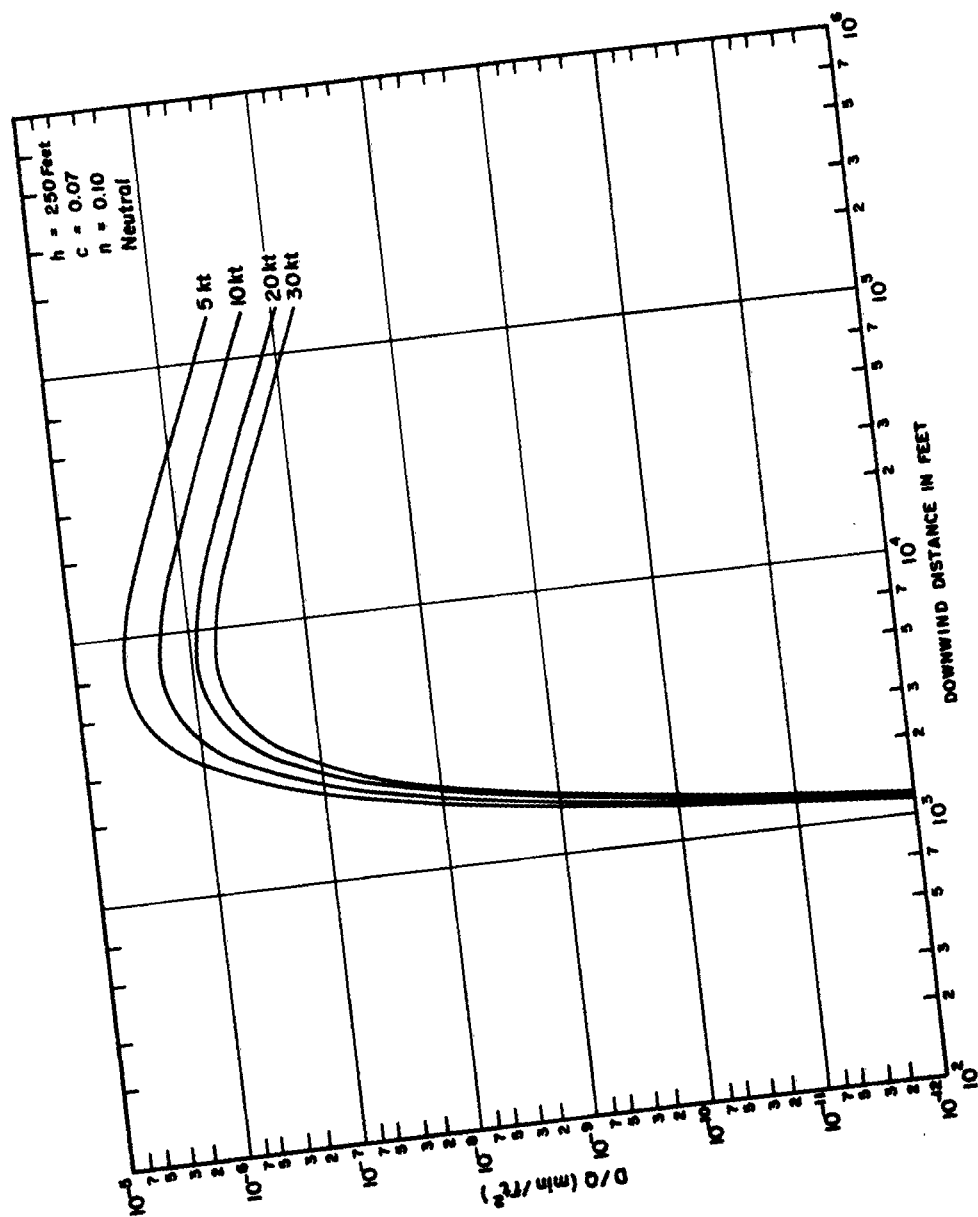


Figure A24

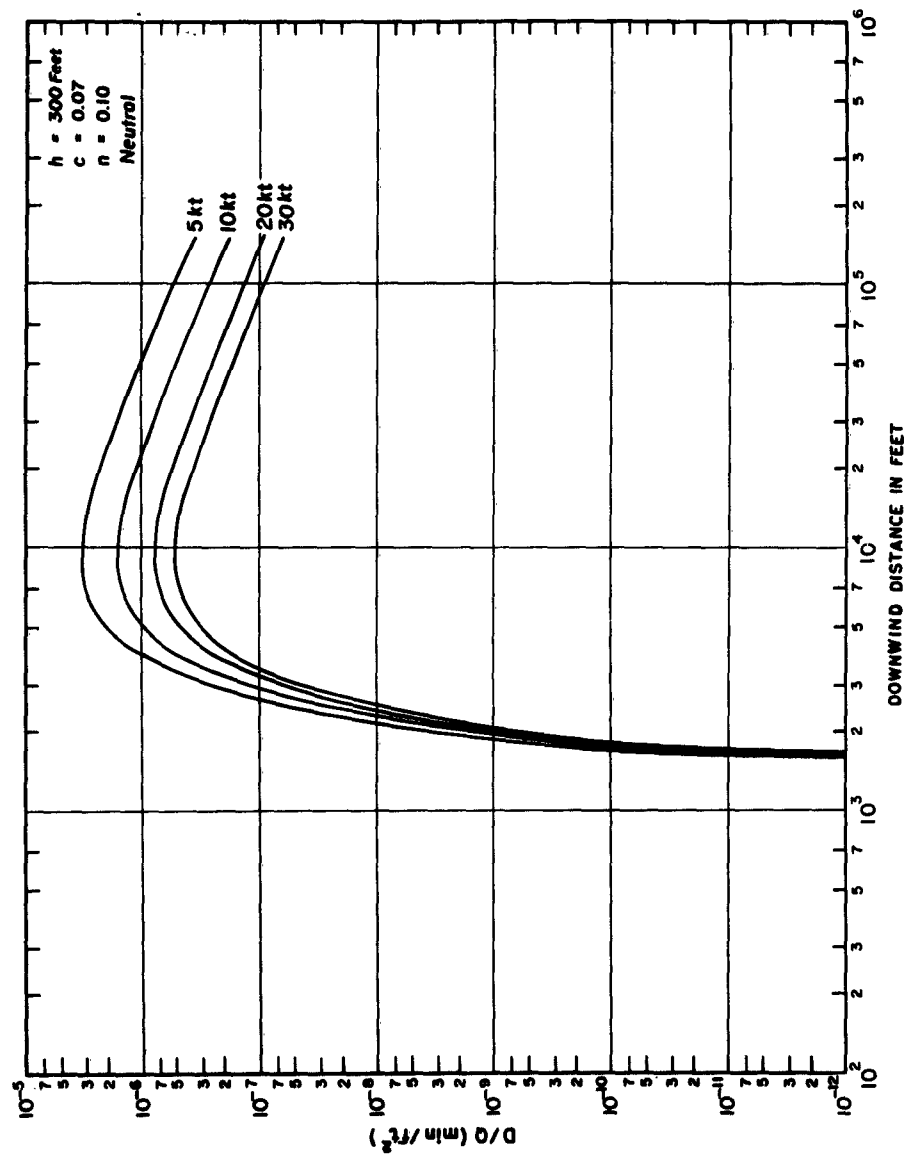


Figure A25

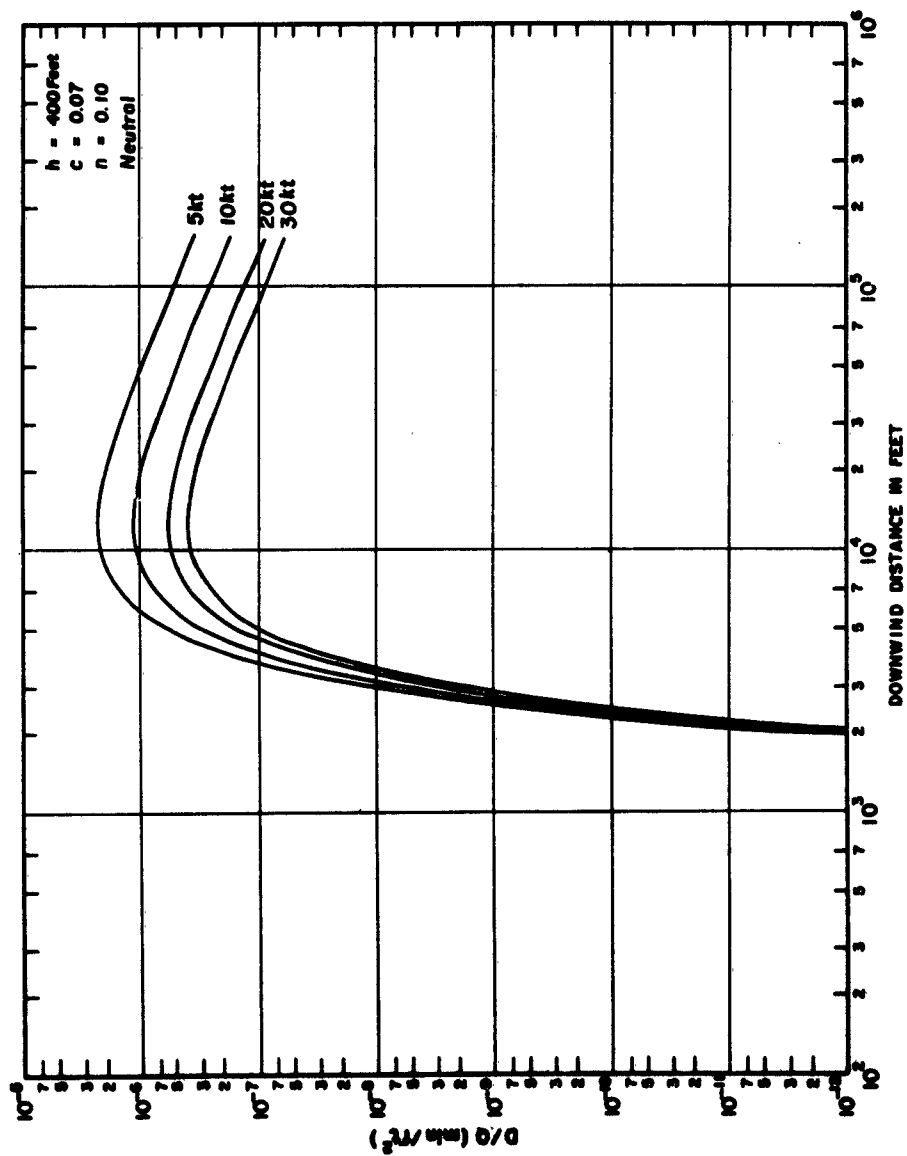


Figure A26

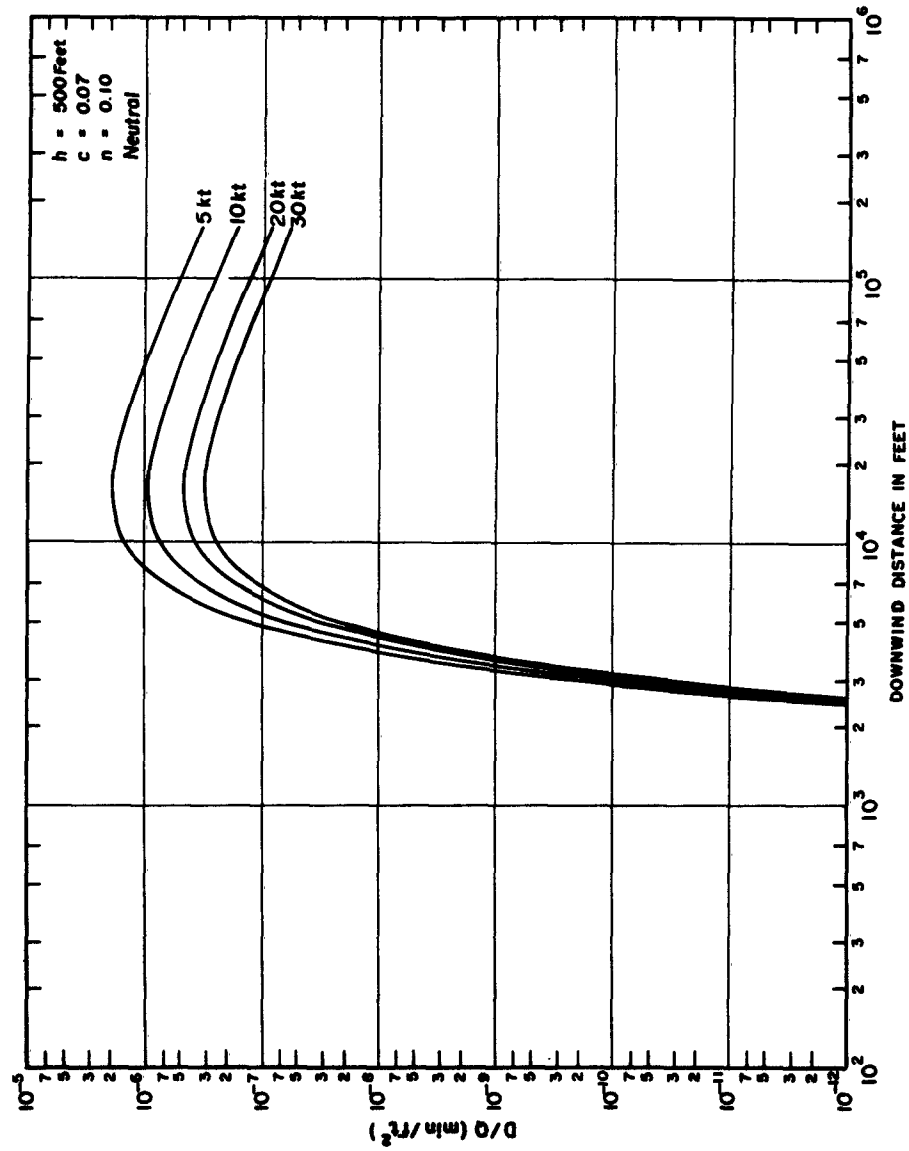


Figure A27

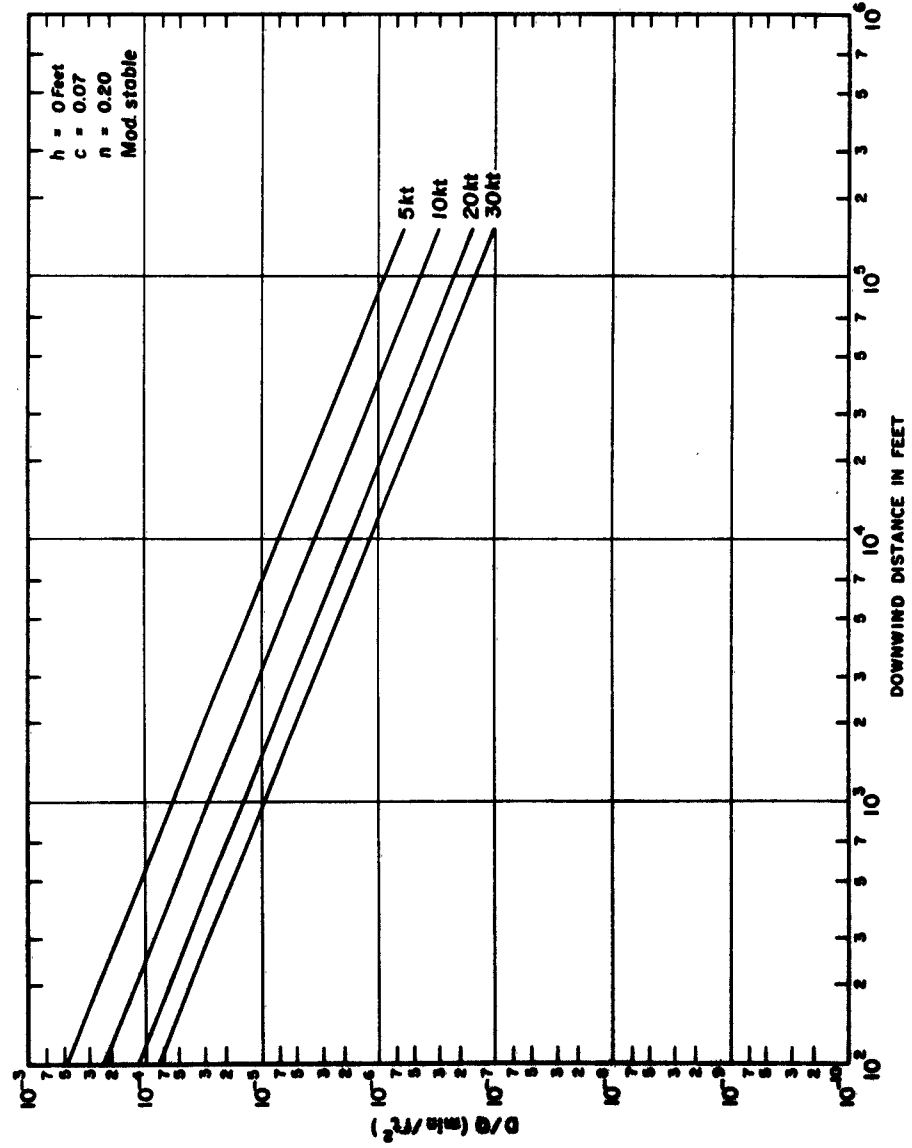


Figure A28

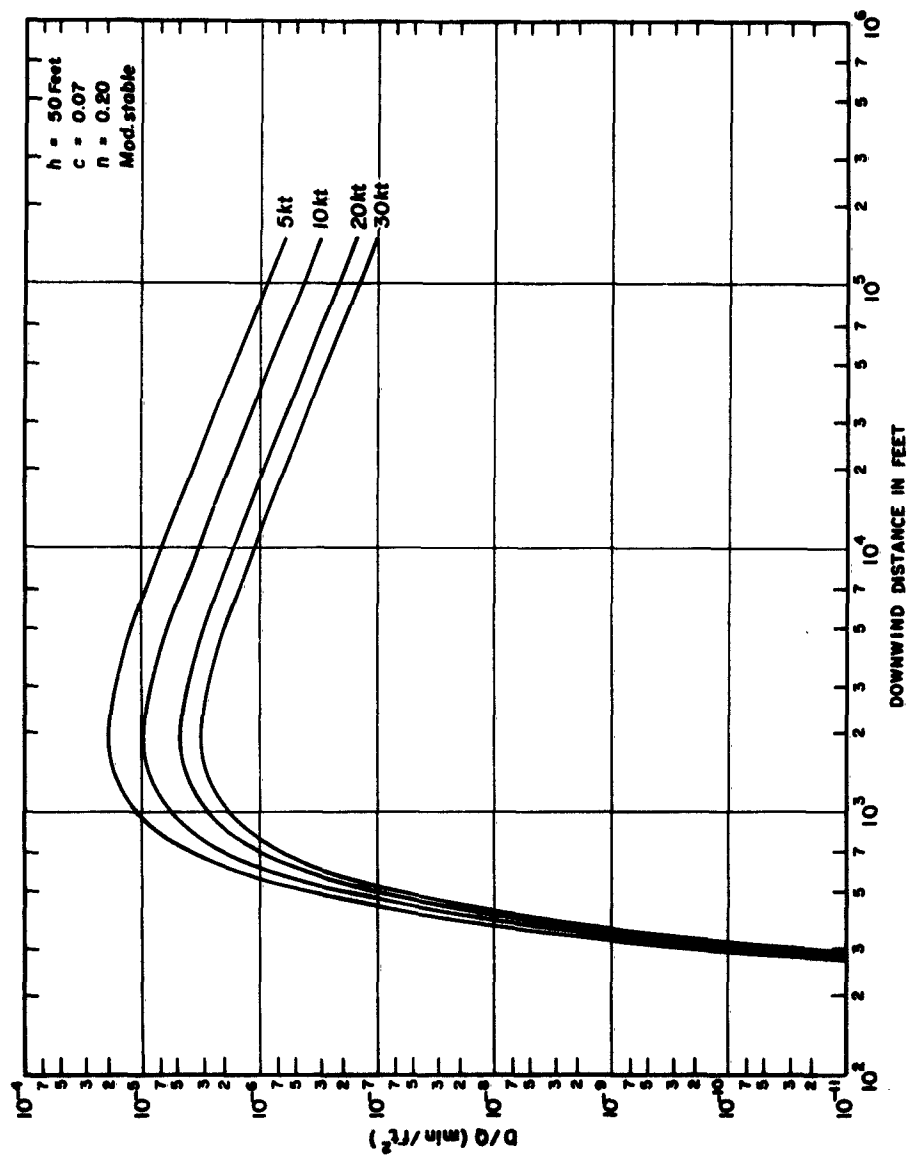


Figure A29

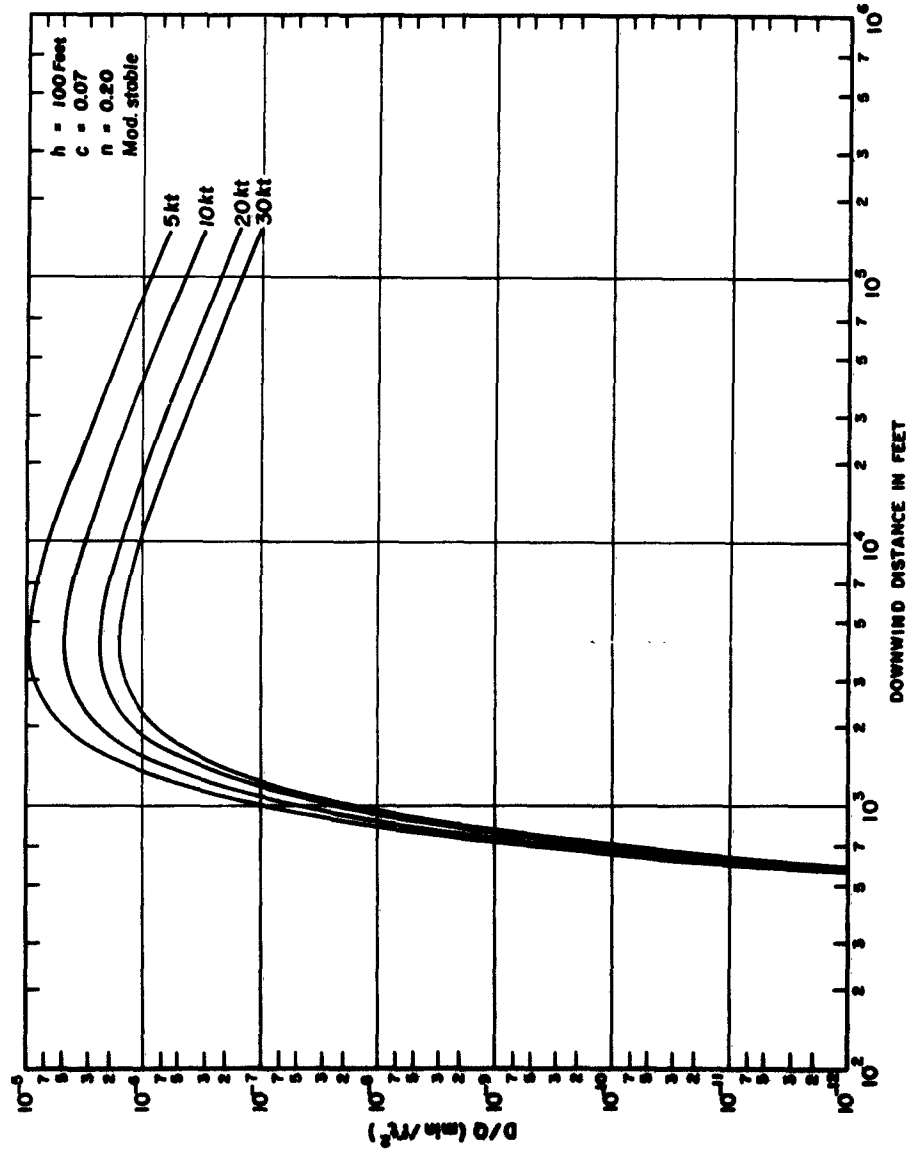


Figure A30

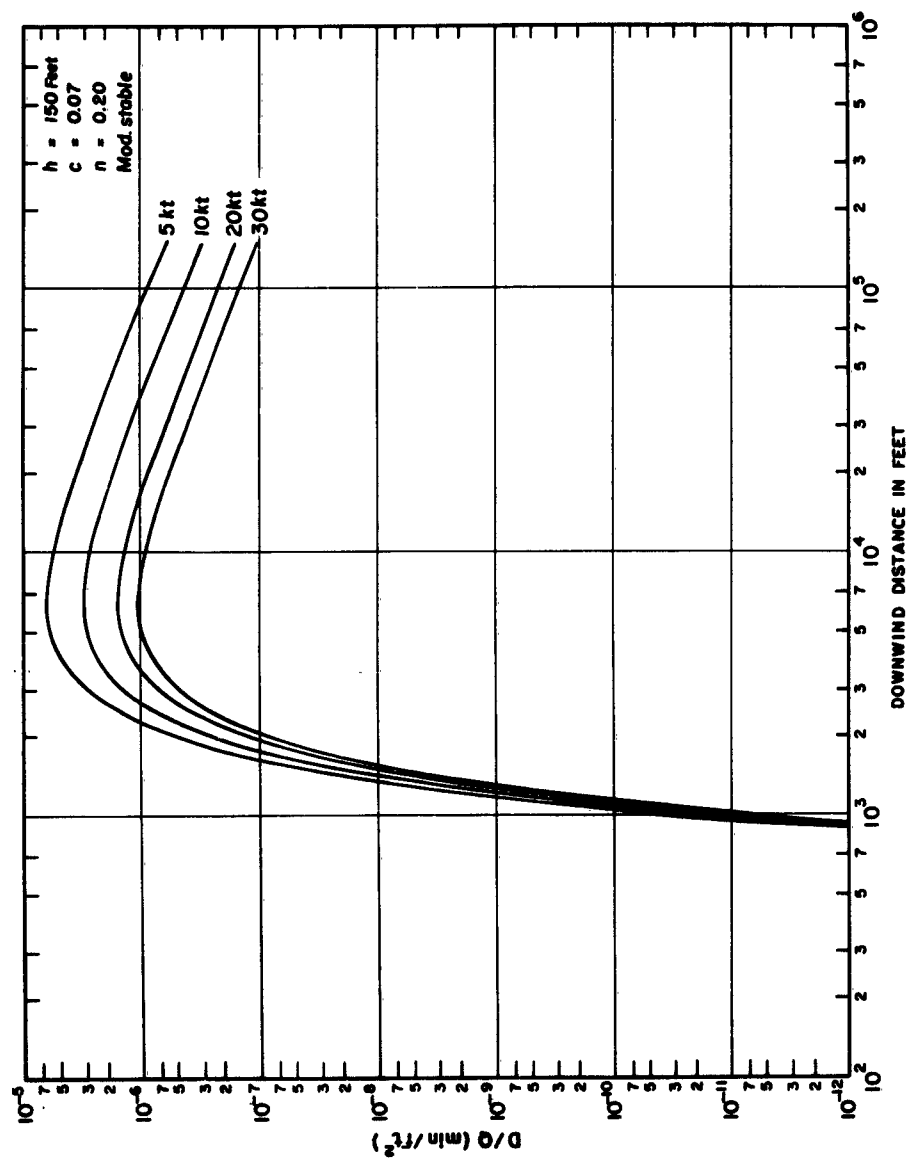


Figure A31

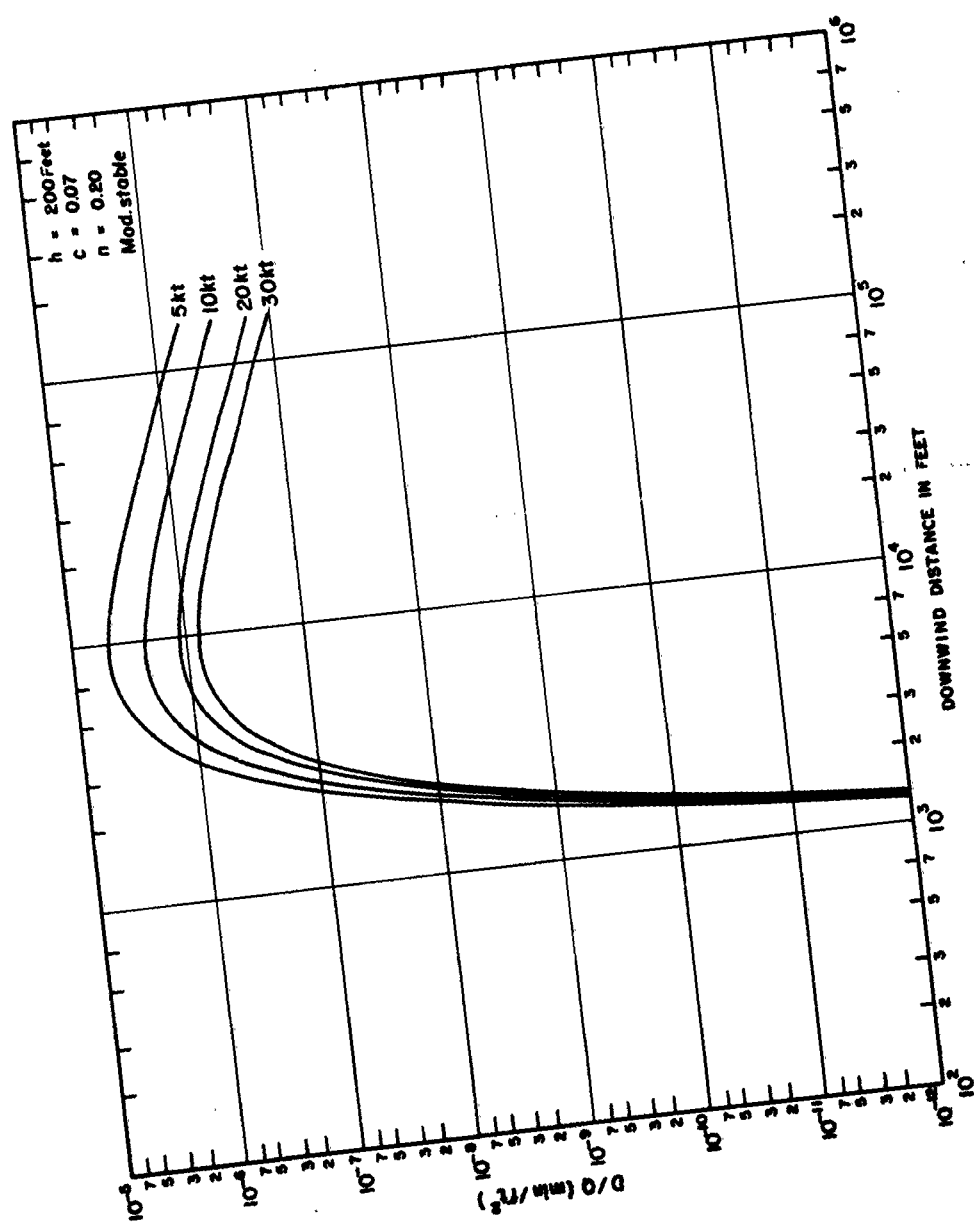


Figure A32

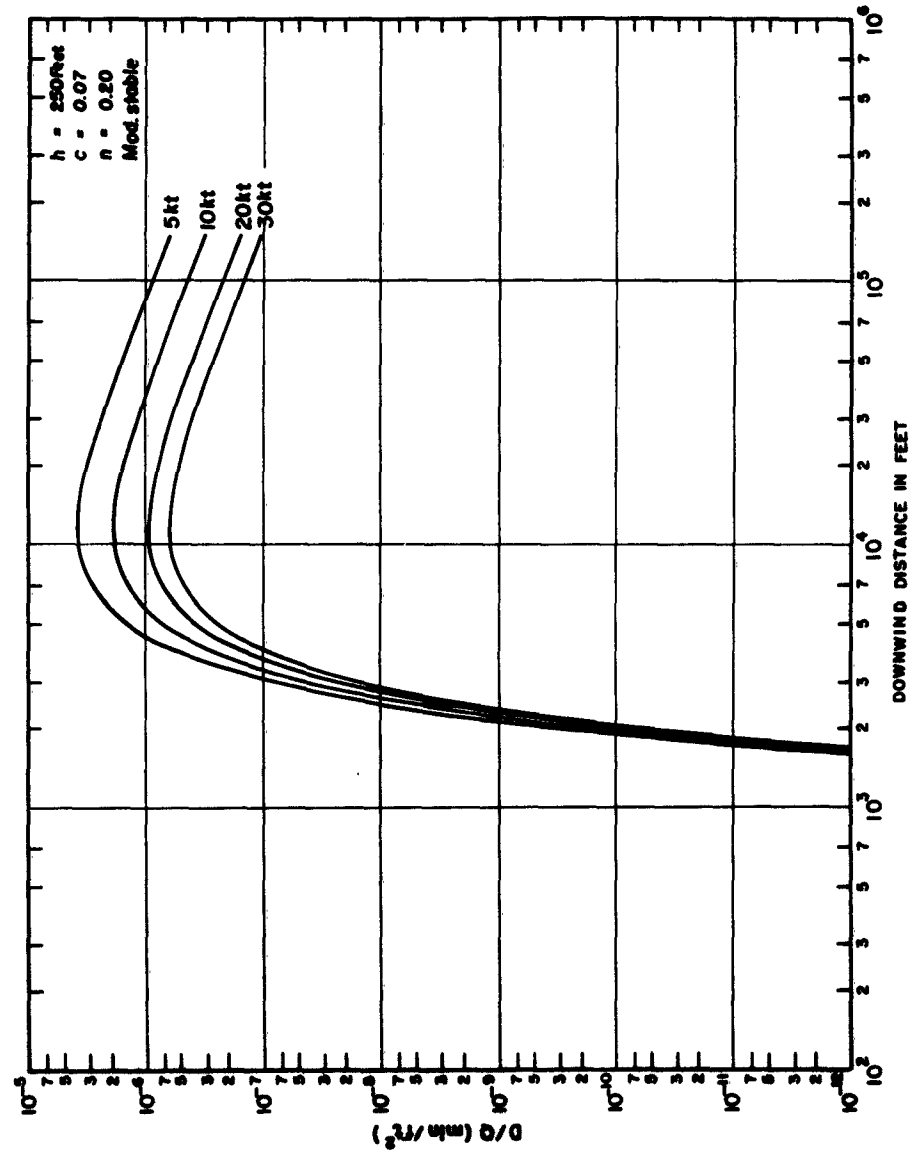


Figure A33

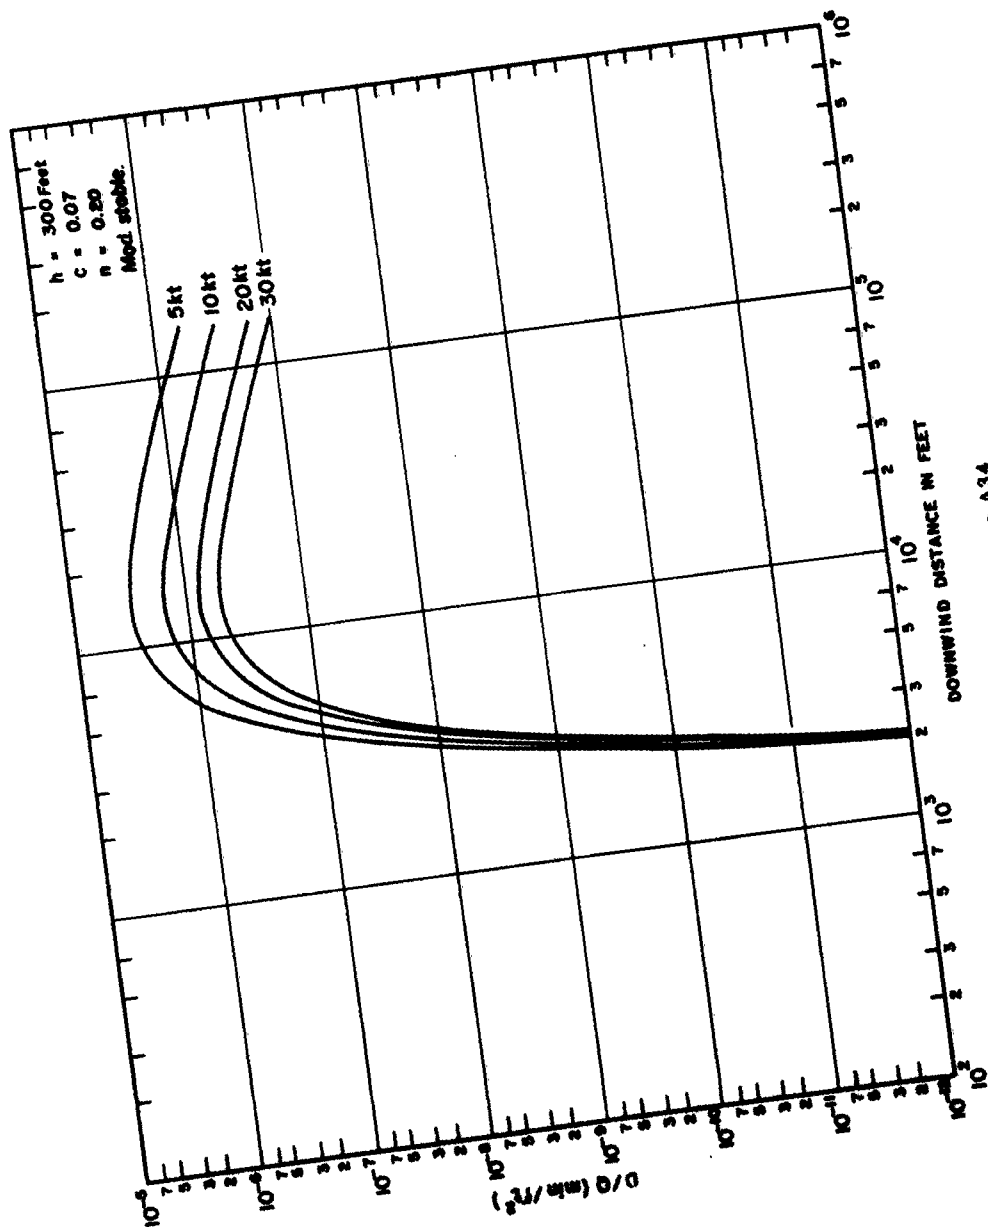


Figure A34

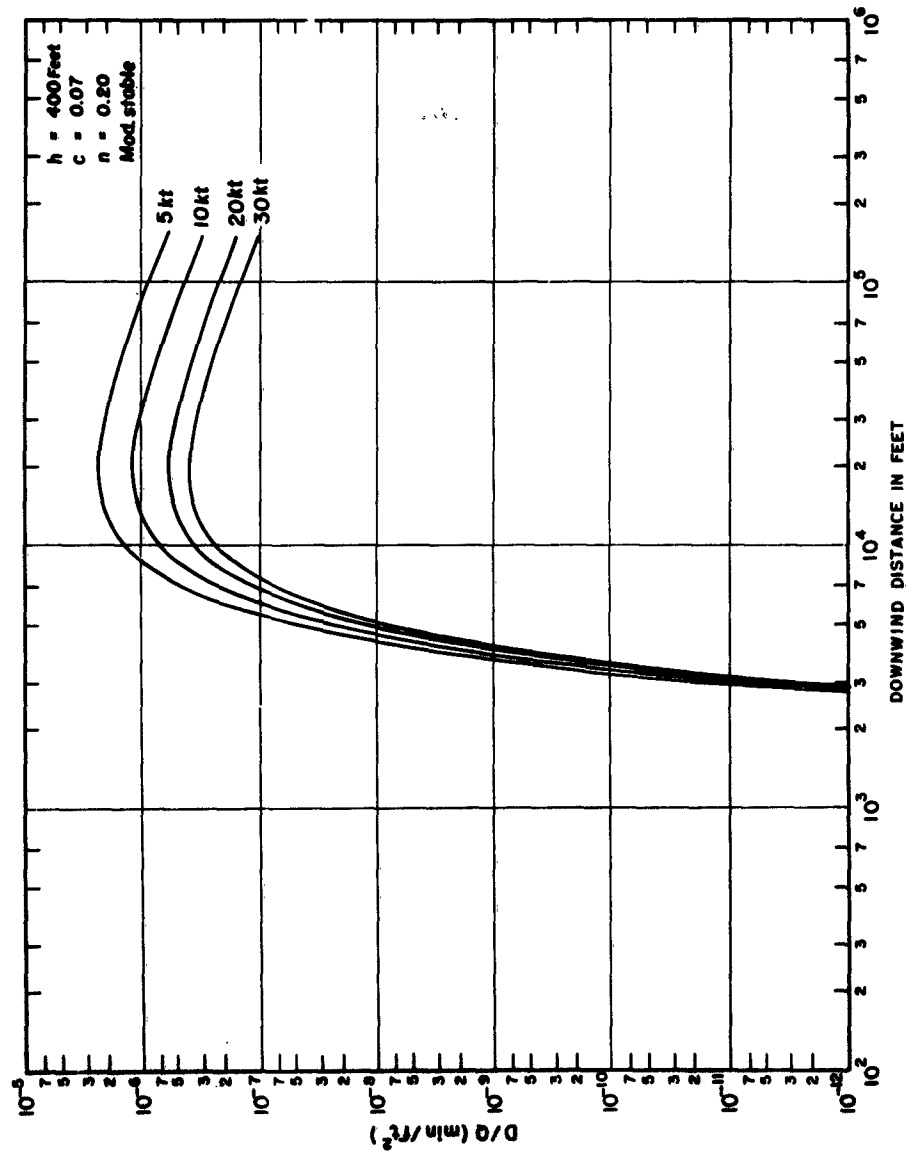


Figure A35

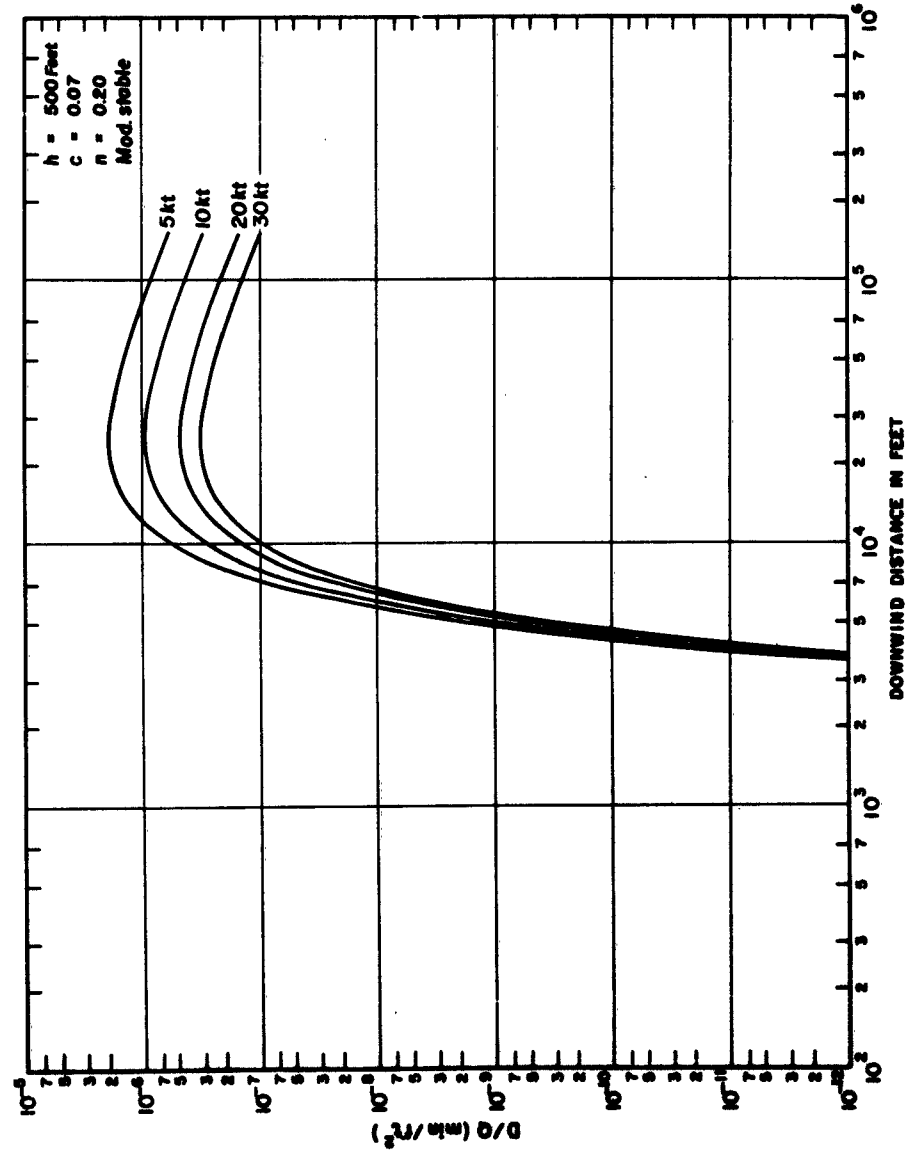


Figure A36

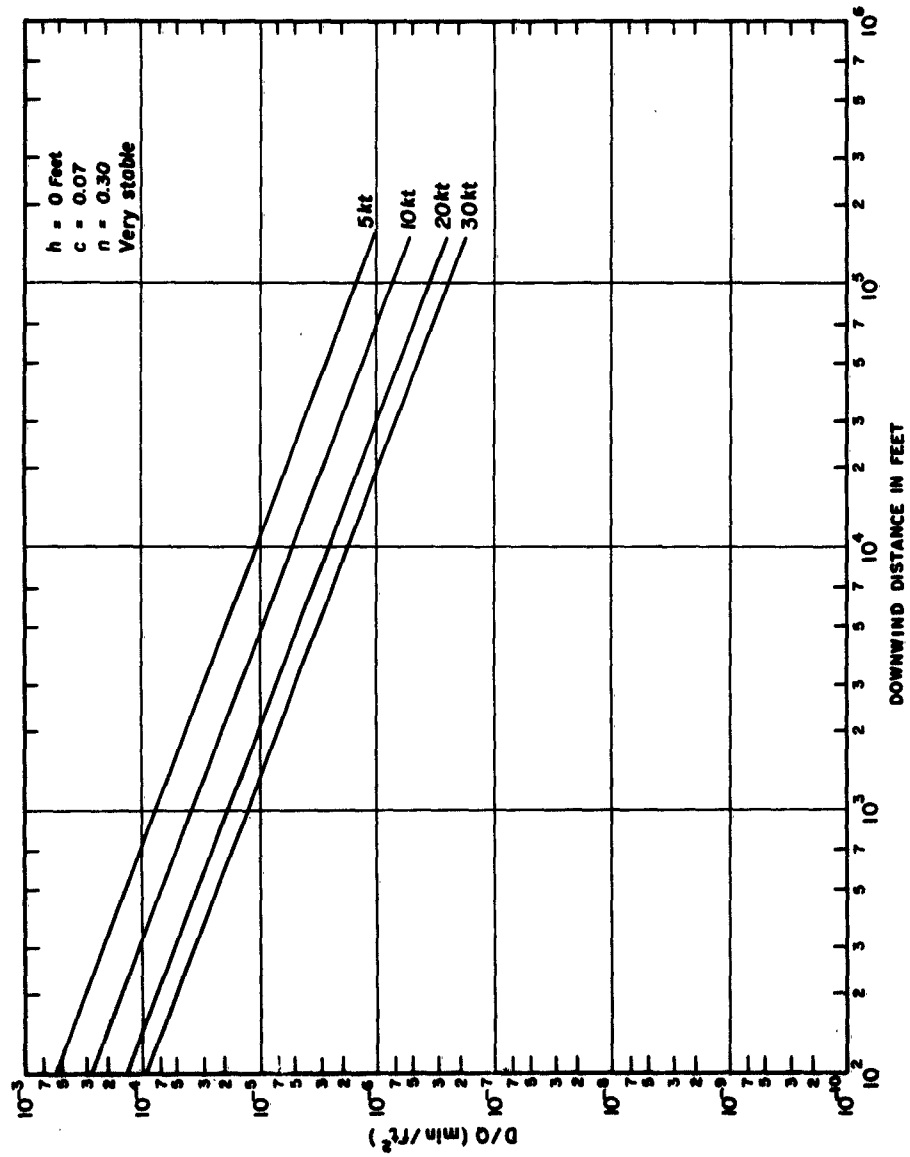


Figure A37

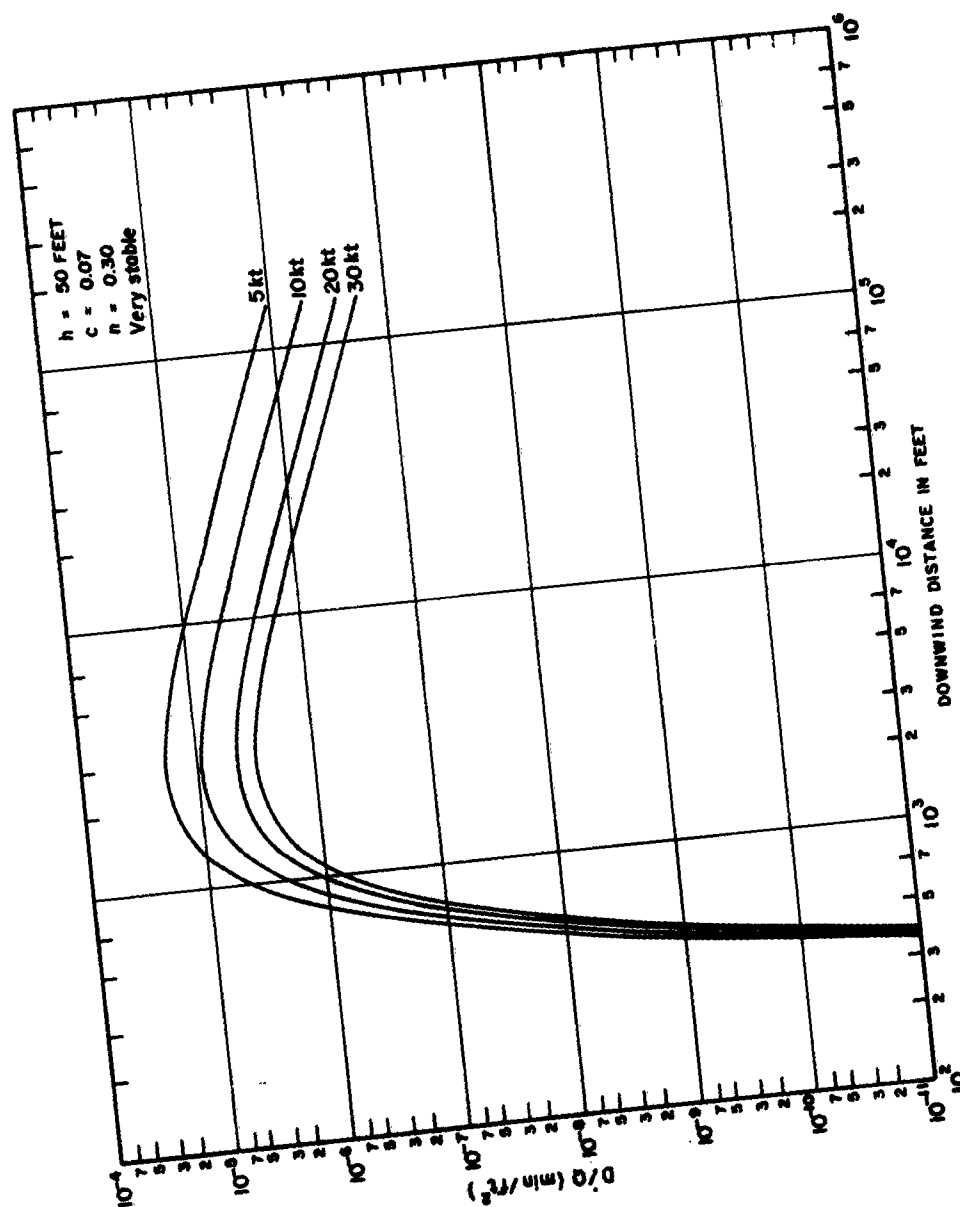


Figure A38

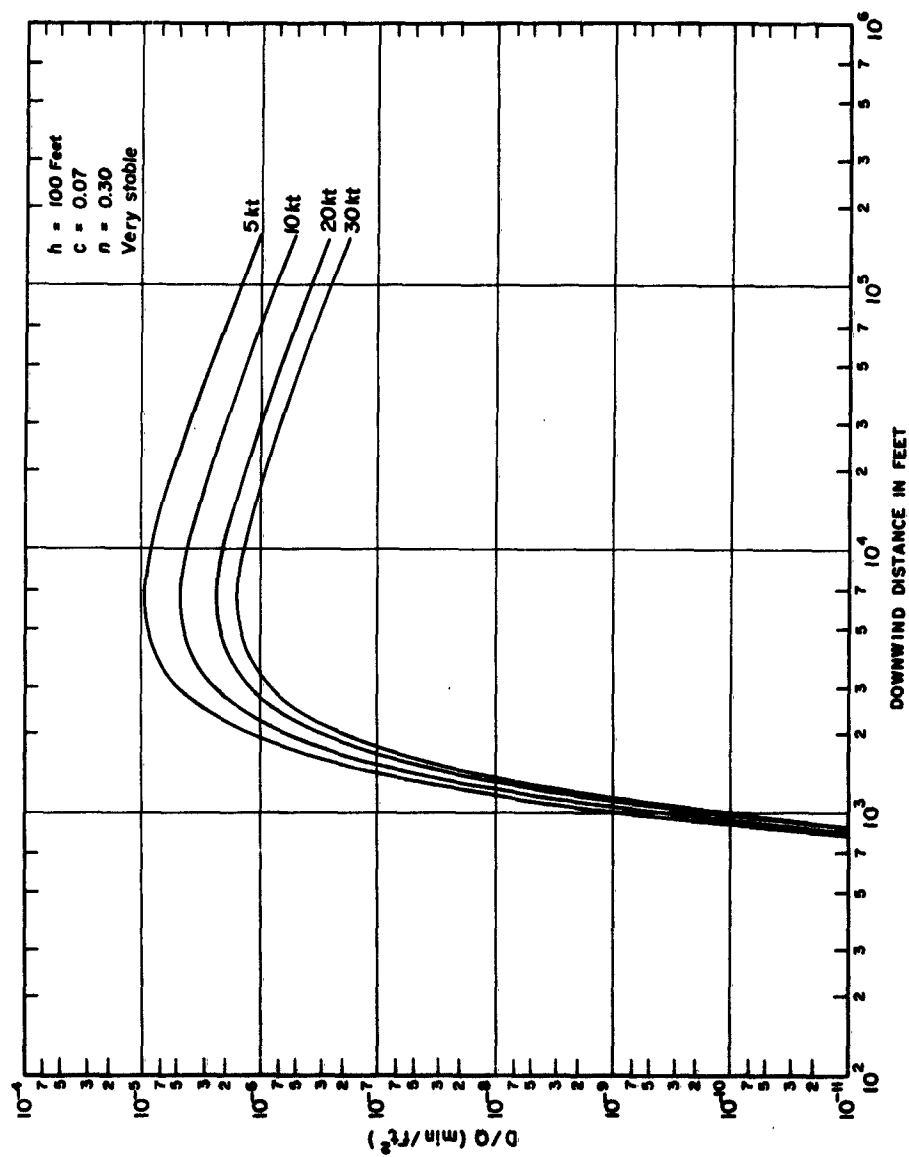


Figure A39

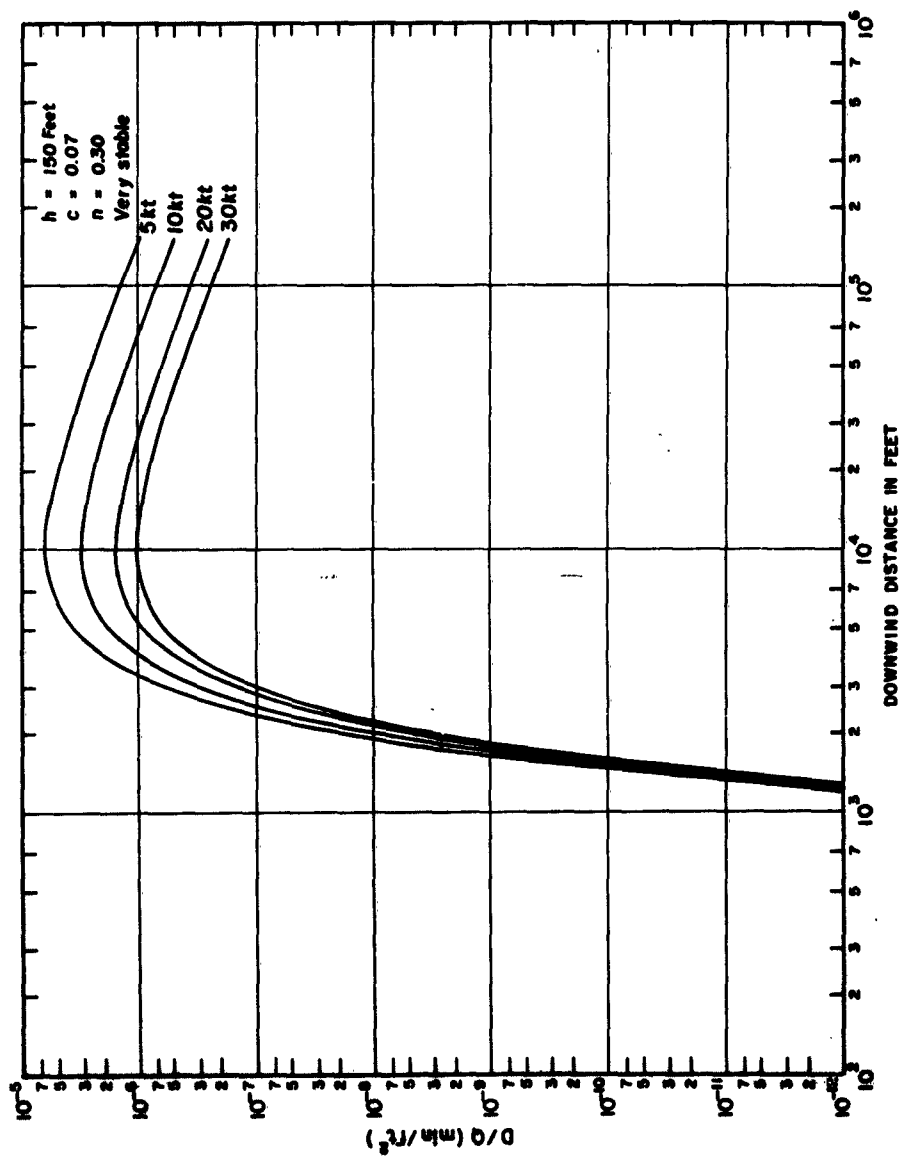


Figure A40

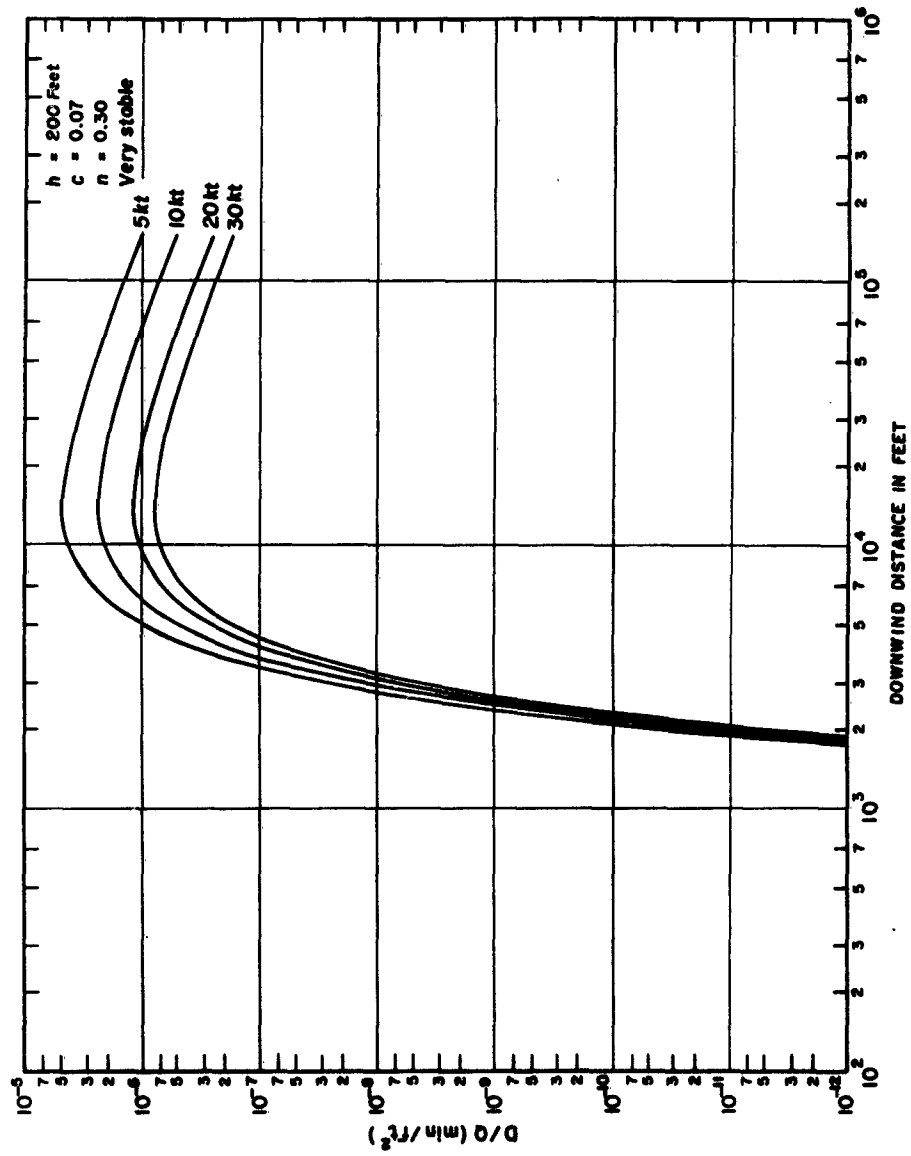


Figure A41

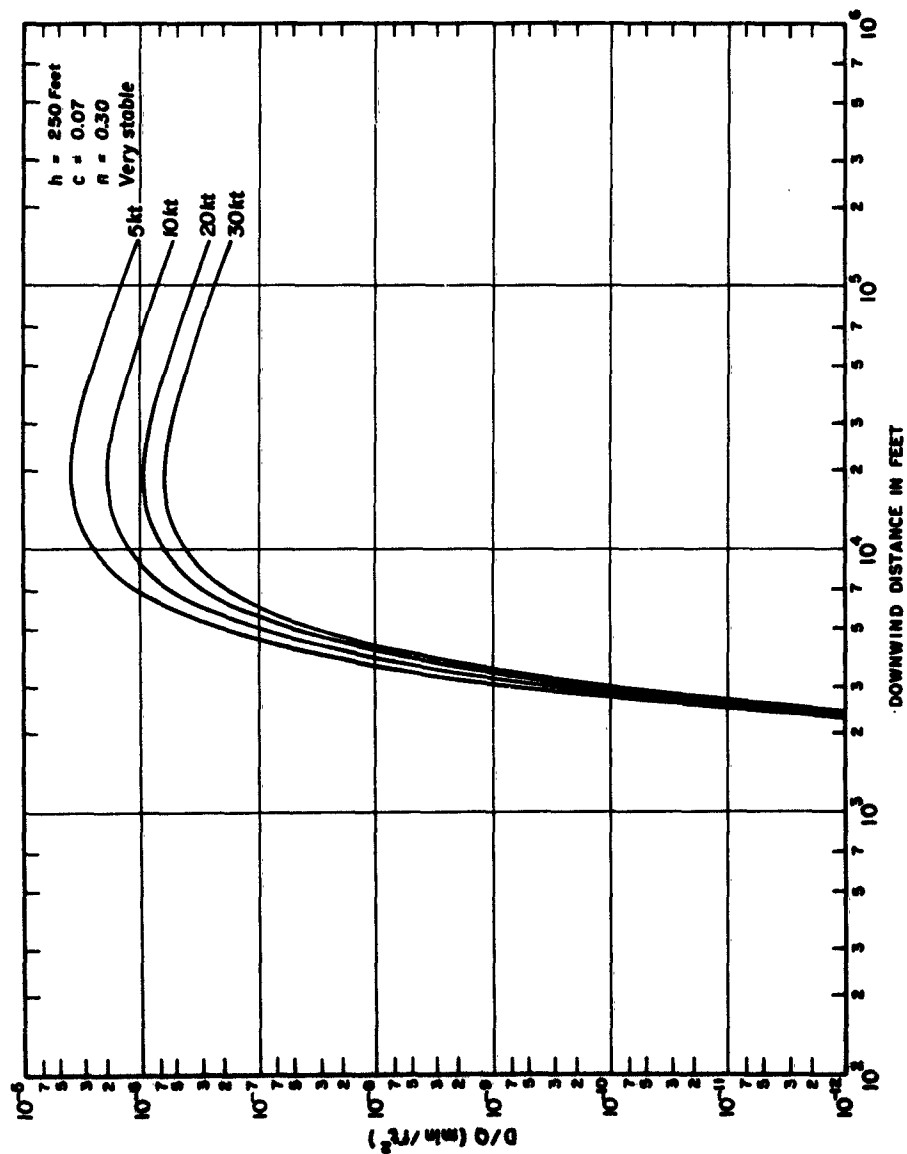


Figure A42

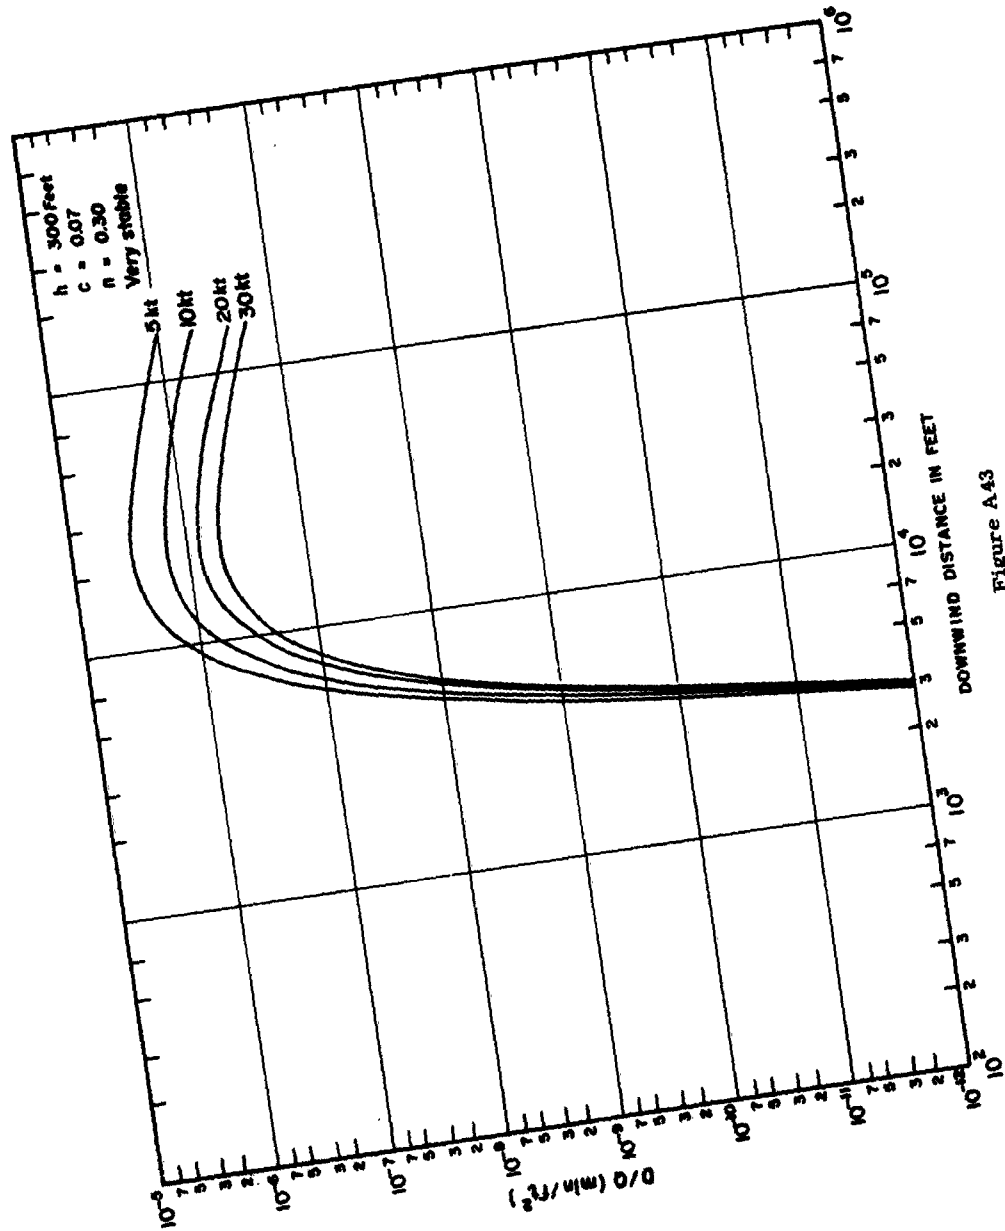


Figure A.43

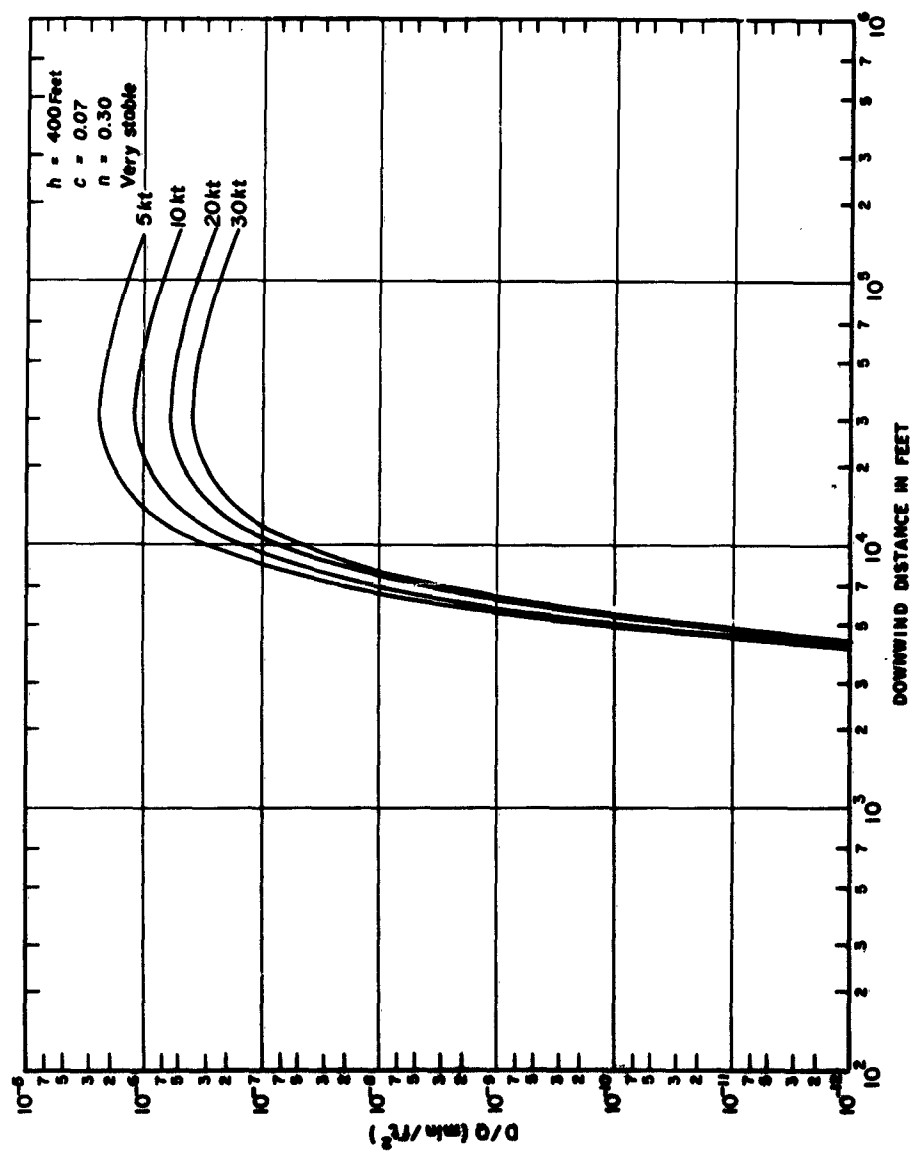


Figure A44

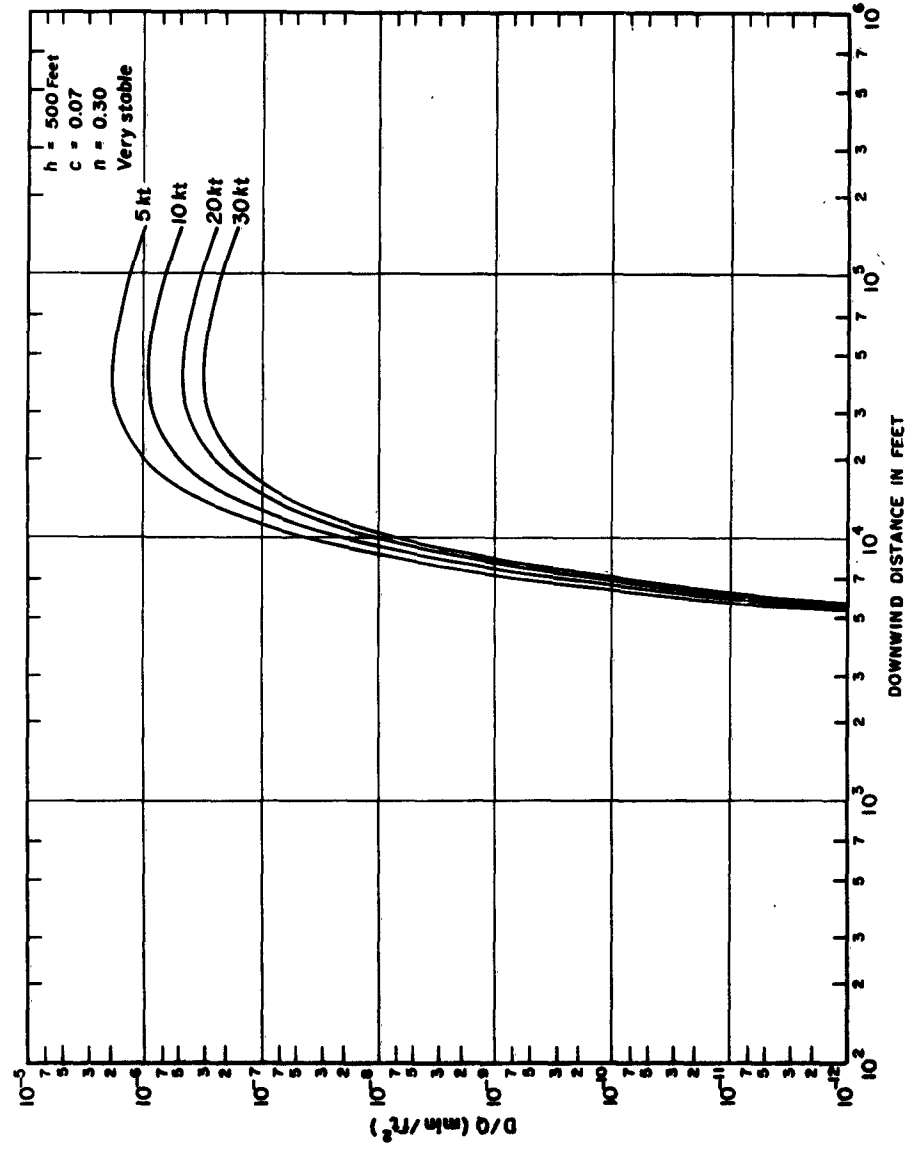


Figure A45

Appendix B

As an example of how the graphs presented here might be used in planning a particular operation, let us consider the following problem. Assume that a grid of samplers has been laid out in, say, a square area 1 mile on a side. Also assume that a line source 200 feet above the surface is to be emitted in moderately unstable conditions. It is, of course, desired that the maximum dosage be found within the array of samplers. The first problem may be to determine how far from the edge of the grid the line should be laid down so that the maximum will be within the grid. Assuming the wind direction is parallel to one of the sides of the grid, we would first check the appropriate graph in Appendix A. The graph for a moderately unstable condition and a release height of 200 feet gives a maximum about 3500 feet from the release. To be fairly sure we have found the maximum, it appears that we should release even farther back. Therefore, a release about 1 mile from the down-wind edge would be indicated.

The next problem would be to determine the length of the release line. The value of x has already been set at 1 mile. Figure 2 indicates that, for moderately unstable conditions, the value of $L-L_0$ should be about 1750 feet. Since we would like to ensure that a significant number of samplers, at the farthest distance from the source, are sampling in conditions that simulate an infinite line source, a value of L_0 equal to 1/2 mile or 2600 feet would be appropriate. Therefore L , the length of the release line, should be $1750 + 2600$ or 4350 feet.

Now a final check on the feasibility of this operation should be made. Assume an aircraft is to lay out the particular line source whose length should be 4350 feet. Since the tanks from which the tracer will be emitted will have some maximum

capacity, say G grams of tracer, then the maximum line source strength, Q' , is fixed at a value of $G/4350$ grams/foot. Also, the samplers will have a minimum dosage, D' , below which they will not give representative values. Thus, a value D'/Q' can be found below which the data will be useless. One can then go back to the graph of D/Q vs. x to see if values greater than D'/Q' would be expected to cover a sufficient area of the grid to ensure adequate definition of the distribution of tracer. If adequate definition of the tracer is not possible then alternatives, such as flying lower or flying more than once along the line while the samplers are left running, must be considered.

AIR FORCE SURVEYS IN GEOPHYSICS

- No.100 A Phenomenological Theory of the Scaling of Fireball Minimum Radiant Intensity with Yield and Altitude (U), *H. K. Sen, Apr 1958. (SECRET Report)*
- No.101 Evaluation of Satellite Observing Network for Project "Space Track", *G. R. Miczaka and H. O. Curtis, Jun 1958.*
- No.102 An Operational System to Measure, Compute, and Present Approach Visibility Information, *T. O. Haig and W. C. Morton, III, Jun 1958.*
- No.103 Hazards of Lightning Discharge to Aircraft, *G. A. Faucher and H. O. Curtis, Aug 1958.*
- No.104 Contrail Prediction and Prevention (U), *C. S. Downie, C. E. Anderson, S. J. Birstein and B. A. Silverman, Aug 1958. (SECRET Report)*
- No.105 Methods of Artificial Fog Dispersal and Their Evaluation, *C. E. Junge, Sep 1958.*
- No.106 Thermal Techniques for Dissipating Fog From Aircraft Runways, *C. S. Downie and R. B. Smith, Sep 1958.*
- No.107 Accuracy of RDF Position Fixes in Tracking Constant-Level Balloons, *K. C. Giles and R. E. Peterson, edited by W. K. Widger, Jr., Oct 1958.*
- No.108 The Effect of Wind Errors on SAGE-Guided Intercepts (U), *E. M. Darling, Jr. and C. D. Kern, Oct 1958 (CONFIDENTIAL Report)*
- No.109 Behavior of Atmospheric Density Profiles, *N. Sissenwine, W. S. Ripley and A. E. Cole, Dec 1958.*
- No.110 Magnetic Determination of Space Vehicle Attitude (U), *J. F. McClay and P. F. Fougere, Mar 1959. (SECRET Report)*
- No.111 Final Report on Exhaust Trail Physics: Project 7630, Task 76308 (U), *M. H. McKenna, and H. O. Curtis, Jul 1959. (SECRET Report)*
- No.112 Accuracy of Mean Monthly Geostrophic Wind Vectors as a Function of Station Network Density, *H. A. Salmela, Jun 1959.*
- No.113 An Estimate of the Strength of the Acoustic Signal Generated by an ICBM Nose Cone Reentry (U), *N. A. Haskell, Aug 1959. (CONFIDENTIAL Report)*
- No.114 The Role of Radiation in Shock Propagation with Applications to Altitude and Yield Scaling of Nuclear Fireballs (U), *H. K. Sen and A. W. Guess, Sep 1959. (SECRET/RESTRICTED DATA Report)*
- No.115 ARDC Model Atmosphere, 1959, *R. A. Minzner, K. S. W. Champion and H. L. Pond, Aug 1959.*
- No.116 Refinements in Utilization of Contour Charts for Climatically Specified Wind Profiles, *A. E. Cole, Oct 1959.*
- No.117 Design Wind Profiles From Japanese Relay Sounding Data, *N. Sissenwine, M. T. Mulkern, and H. A. Salmela, Dec 1959.*
- No.118 Military Applications of Supercooled Cloud and Fog Dissipation, *C. S. Downie, and B. A. Silverman, Dec 1959.*
- No.119 Factor Analysis and Stepwise Regression Applied to the 24-Hour Prediction of 500-mb Winds, Temperatures, and Heights Over a Silent Area (U), *E. J. Aubert, I. A. Lund, A. Thomasell, Jr., and J. J. Pazniokas, Feb 1960. (CONFIDENTIAL Report)*
- No.120 An Estimate of Precipitable Water Along High-Altitude Ray Paths, *Murray Gutnick, Mar 1960.*
- No.121 Analyzing and Forecasting Meteorological Conditions in the Upper Troposphere and Lower Stratosphere, *R. M. Endlich and G. S. McLean, Apr 1960.*
- No.122 Analysis and Prediction of the 500-mb Surface in a Silent Area, (U), *E. A. Aubert, May 1960. (CONFIDENTIAL Report).*
- No.123 A Diffusion-Deposition Model for In-Flight Release of Fission Fragments, *M. L. Barad, D. A. Haugen, and J. J. Fuquay, Jun 1960.*
- No.124 Research and Development in the Field of Geodetic Science, *C. E. Ewing, Aug 1960.*
- No.125 Extreme Value Statistics -- A Method of Application, *I. I. Gringorten, Jun 1960.*
- No.126 Notes on the Meteorology of the Tropical Pacific and Southeast Asia, *W. D. Mount, Jun 1960.*
- No.127 Investigations of Ice-Free Sites for Aircraft Landings in East Greenland, 1959, *J.H. Hartshorn, G. E. Stoerts, A. N. Kover, and S. N. Davis, Sep 1961.*
- No.128 Guide for Computation of Horizontal Geodetic Surveys, *H. R. Kahler and N. A. Roy, Dec 1960.*

AIR FORCE SURVEYS IN GEOPHYSICS (Continued)

- No.129 An Investigation of a Perennially Frozen Lake, *D. F. Barnes, Dec 1960.*
- No.130 Analytic Specification of Magnetic Fields, *P. F. Fougere, Dec 1960. (CONFIDENTIAL Report)*
- No.131 An Investigation of Symbol Coding for Weather Data Transmission, *P. I. Herahberg, Dec 1960.*
- No.132 Evaluation of an Arctic Ice-Free Land Site and Results of C-130 Aircraft Test Landings -
Polaris Promontory, No. Greenland, 1958-1959, *S. Needleman, D. Klick, C. E. Molineux, Mar 1961.*
- No.133 Effectiveness of the SAGE System in Relation to Wind Forecast Capability (U),
E. M. Darling, Jr., and Capt. C. D. Kern, May 1961. (CONFIDENTIAL Report)
- No. 134 Area-Dosage Relationships and Time of Tracer Arrival in the Green Glow Program,
W. P. Elliott, R. J. Engelmann, P. W. Nickola, May 1961.
- No. 135 Evaluation of Arctic Ice-Free Land Sites - Kronprins Christian Land and Peary
Land, North Greenland, 1960, *W. E. Davies and D. B. Krinsley, May 1961.*
- No. 136 Missile Borne Radiometer Measurements of the Thermal Emission Characteristics of
ICBM Plumes (U), *R. E. Hunter and L. P. Marcotte, Jul 1961. (SECRET Report)*
- No. 137 Infrared Studies of ICBM Plumes Using Missile - Borne Spectrometers (U), *R. E. Hunter
and L. P. Marcotte, Sep 1961. (SECRET Report).*
- No. 138 Arctic Terrain Investigations Centrum Lake, N E Greenland, 1960, *S. M. Needleman
Jul 1962.*
- No. 139 Space and Planetary Environments, *S. I. Valley, Editor, Jan 1962*
- No. 140 Proceedings of National Symposium on Winds for Aerospace Vehicle Design,
N. Sissenuwine and H. G. Kasten, Co-Chairmen, Mar 1962.
- No. 141 Atlas of Monthly Mean Stratosphere Charts, 1955-1959, Vol. I, January to June,
H. S. Muench May 1962.
- No. 142 Infrared Atmospheric Transmissions: Some Papers on the Solar Spectrum from 3 to 15
Microns, *J. N. Howard and J. S. Garing, Dec 1961.*
- No. 143 AFCRL Ballistic Missile Infrared Measurements, IRMP 59/60, *T. P. Condon,
J. J. Lovett and R. L. Morgan, June 1962.*
- No. 144 Effective Transmission of Thermal Radiation from Nuclear Detonations in Real Atmos-
pheres, *J. P. Cahill, H. P. Gauvin and J. C. Johnson, June 1962.*
- No. 145 Summary Report - Project ICEWAY, *W. D. Kingery, Editor, May 1962.*
- No. 146 Silent Area Wind for USAF Manned Bombers (U), *E. M. Darling, Jr., I. A. Lund,
Jul 1962 (SECRET Report).*
- No. 147 Mean Annual Mid-Latitude Moisture Profiles to 31 Km, *M. Gutnick, Jul 1962.*
- No. 148 Spectral and Spatial Measurements of Infrared Radiation (U), *L. C. Block, L. P. Marcotte
and C. C. Ferriso, May 1962 (SECRET Report).*
- No. 149 Infrared Celestial Backgrounds, *R. G. Walker, Jul 1962.*
- No. 150 Transmission of the Atmosphere in the Infrared, A Review, *J. N. Howard and J. S. Garing,
Jul 1962.*
- No. 151 Density Distribution, Interlevel Correlations and Variation With Wind, *Allen E. Cole
and Arnold Court, Jul 1962.*
- No. 152 The Development of an Operational Contrail Suppression System (U), *Seymour J. Birstein,
Aug 1962 (CONFIDENTIAL Report).*
- No. 153 Air Force Interim Supplemental Atmospheres to 90 Kilometers, *Allen E. Cole
and Arthur J. Kantor, Dec. 1963.*
- No. 154 Proceedings of the AFCRL Scientific Balloon Symposium, *Dec. 1963.*
- No. 155(I) Celestial Background Radiation. Vol. I, A Revised Scale of Bolometric Corrections,
Russell G. Walker, March 1964.
- No. 156 Operational Prediction of Diffusion Downwind From Line Sources, *William P. Elliot and
Merton L. Barad, March 1964.*